


WiFi

The Manual of WiFi socket

目录 catalog

1. 产品简介 Introduction	2
2. 注册登录 Register& Login	3
3. 添加设备 Add the device.....	6
4. 设备操作 Device operate	8
1) 设备开关 Switch the device	8
2) 配置锁定 Lock Setting	10
3) 插座编辑 Socket Modify.....	11
4) 定时、倒计时、防盗 Timer,Countdown,Absence	12
5. 能量信息 Energy Information.....	21
6. RF 设备配置 RF Device Setting.....	24
7. 修改密码 Change Password	31
8. 注销退出 Logout	33

1. 产品简介 Introduction

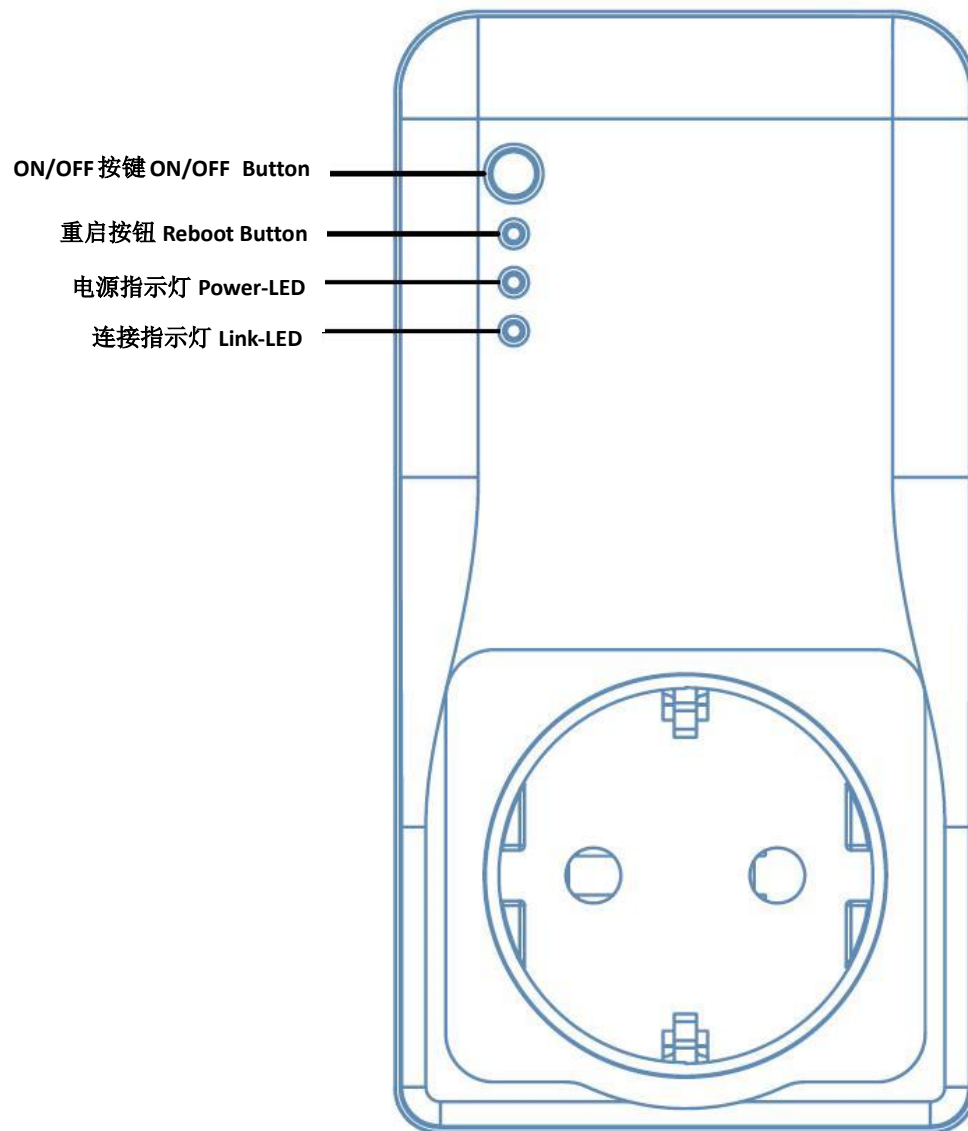


参数 Specification

Electrical Rating: 230V~/ 50Hz / 16A / Max.3680W


WiFi: 2.412 ~ 2.484 GHz IEEE802.11b / g / n

Number of Power outlets: 1


2. 注册登录 Register& Login

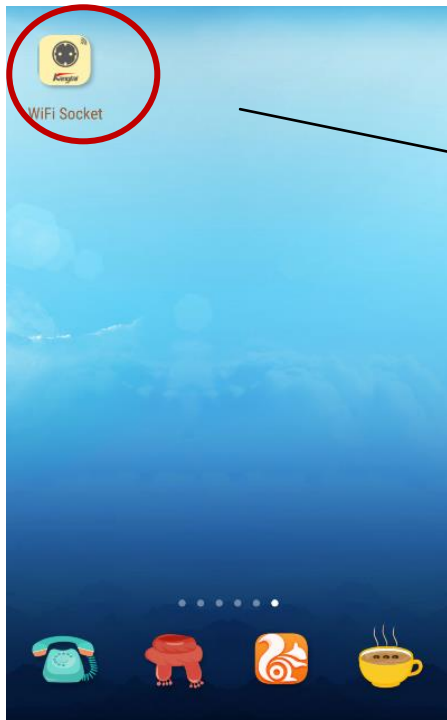

在手机安装 APP 后, 点击对应图标运行程序。After installing the APP, please click it as the picture show.

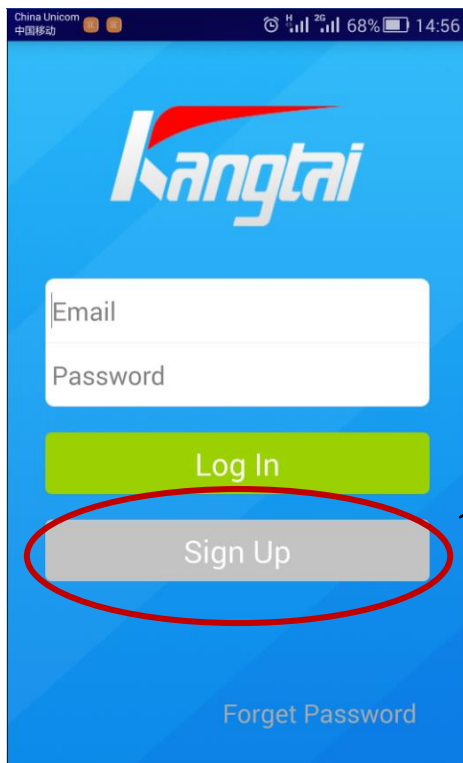


首次操作, 点击 Sign up 按钮注册 (已注册用户跳过此步骤)。注册和登陆需要手机接入 internet
First of all, please click "sign up" button (if you have registered, please skip this step). It is necessary to connect with internet when you try to register and login.

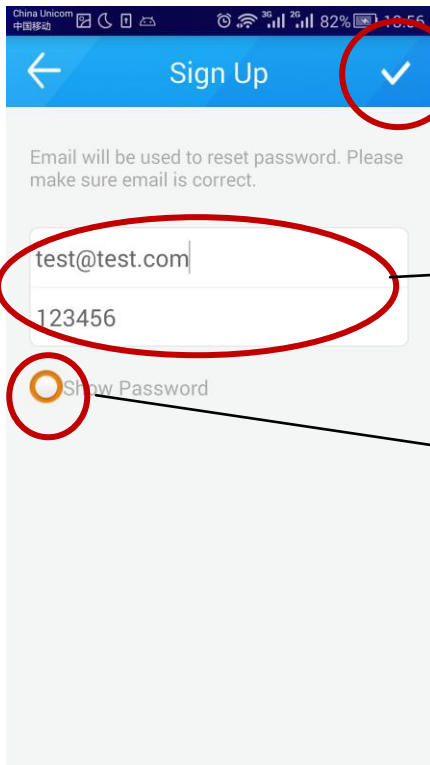


3、输入完毕后，点击此处按钮，完成注册资料填写 After the input is complete, please click this button to save the information.

1、在此页，分别输入注册的邮箱及密码 You can fill in your email address and password separately in this area.


2、点击此处可以在显示密码及不显示密码之间切换，目前表示显示密码 Click here to show the password and hide it. In current mode, the password is visible.

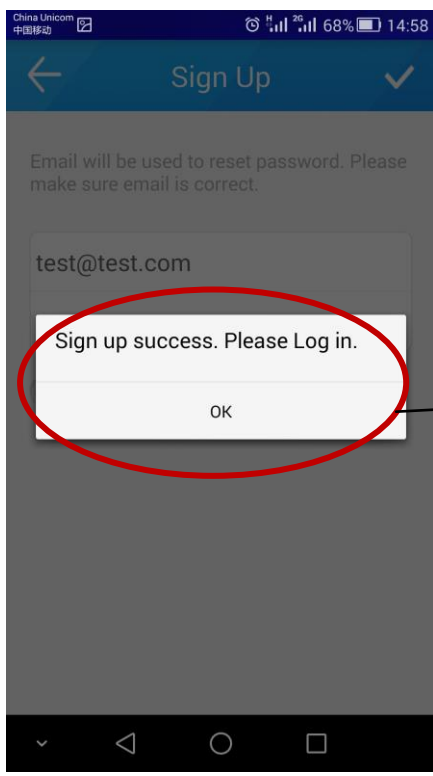

跳出此对话框，点击 OK，结束注册，自动返回登陆页面 Please click the "OK" button to complete the register and it will return to the Login screen.

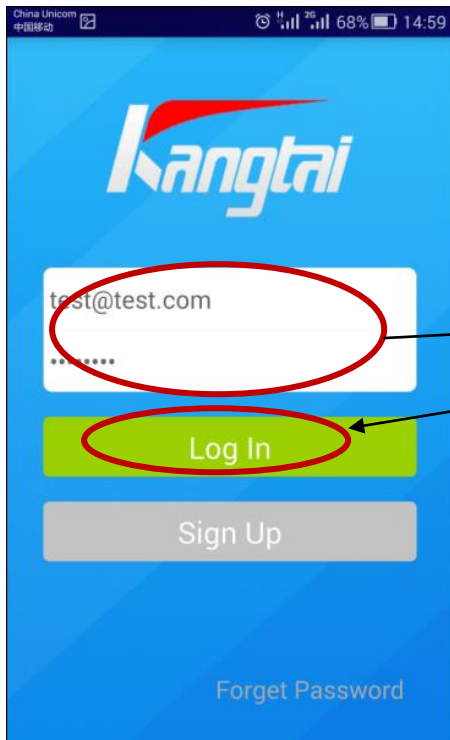


在自动返回的登陆页面,正确输入已经注册的账号、密码,正确输入之后点击 Log in 登陆
Please fill in your registered ID and correct password to login system.

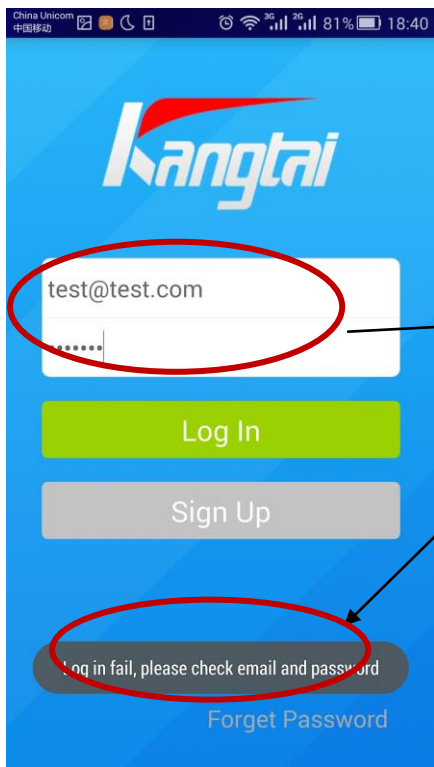


填写错误或填写未注册信息,会出现如下提示,请重新输入或注册。If the information is incorrect,you can see the information as "Log in fail,check email and password"


3. 添加设备 Add the device

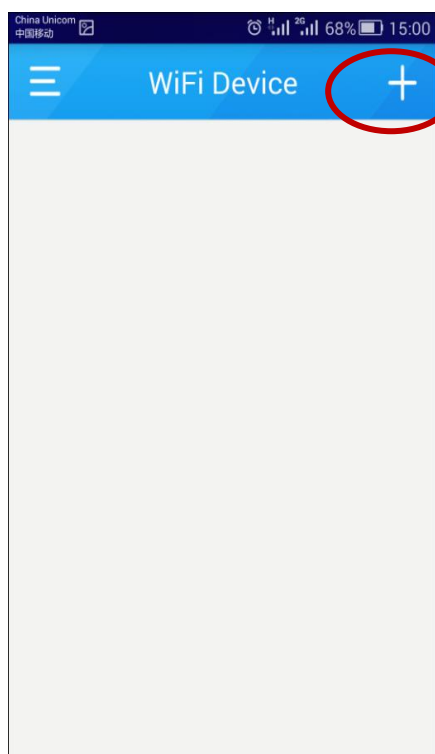

成功登陆后,在页面的右上角点击此按钮进入配置页面。
You can click the button "cross symbol" to enter the setting page when you have login.

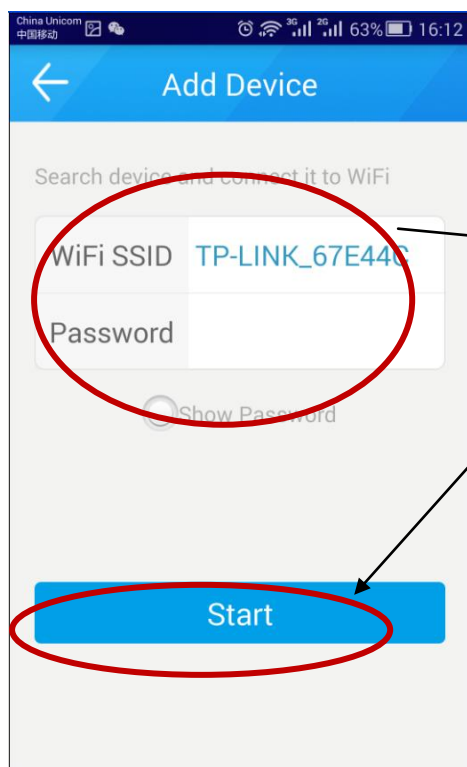


此时请确保手机已连接到无线路由器,正确输入对应的WIFI密码。在点击开始按钮前,请长按WIFI插座的ON/OFF按键3秒以上,这时绿灯快速闪烁,进入配置状态。最后点击开始按钮 Please make sure the phone has been connected to the Wireless Router, and fill in the correct password. Before click the "start" button, please press the "ON/OFF" button on WIFI socket and hold it at least 3 seconds. when the green lamp start twinkling quickly, it means the device has been in the setting status, then click the "START" button.

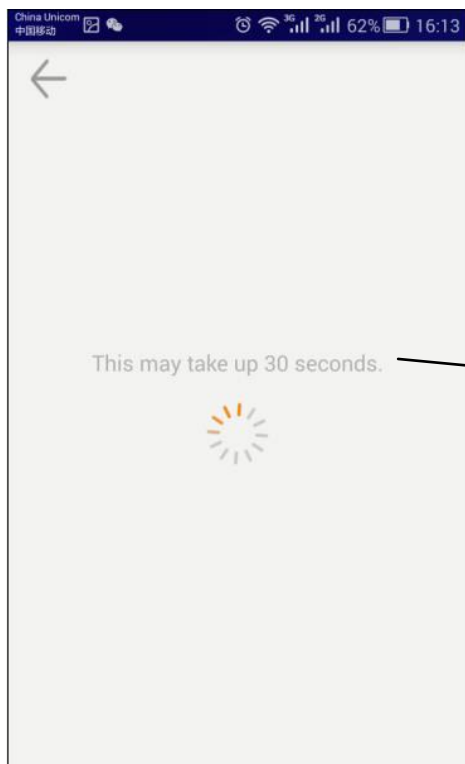


点击开始后,跳出此对话框,表示正在配置 After click the "START" button,you can see the sentence "This may take up 30 seconds" .It is the witness that the device is in setting mode.

4. 设备操作 Device operate

1) 设备开关 Switch the device

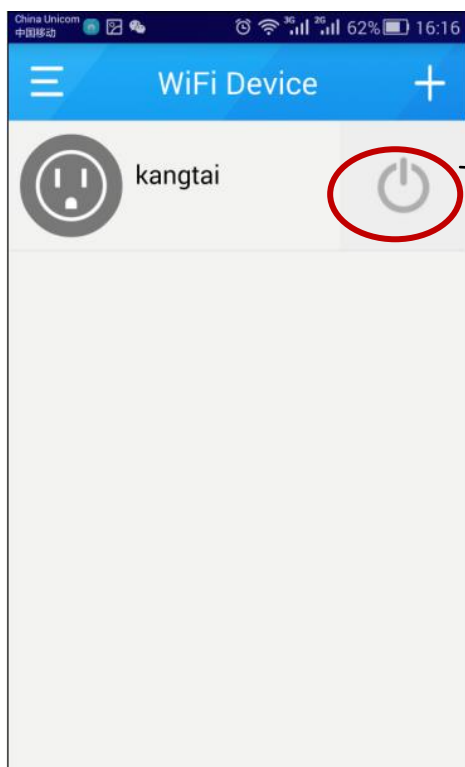


跳出此界面，表示配置成功，您可对已经连接的设备进行操作，左图表示插座关闭状态，点击可开启插座 If you can see the scene as the the left picture, it prove that the setting is success . You can operate the device which has been connected .The device on left picture is turn off and you can click the right button to turn on it.

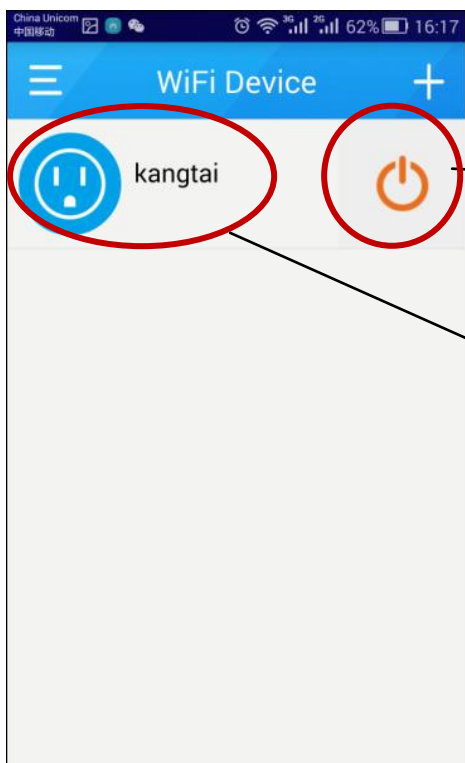

此时表示插座开启状态
This status is "Turn on" mode.


点击此区域可对进入插座设置页面
You can click the device symbol as the left picture to enter the socket setting page.

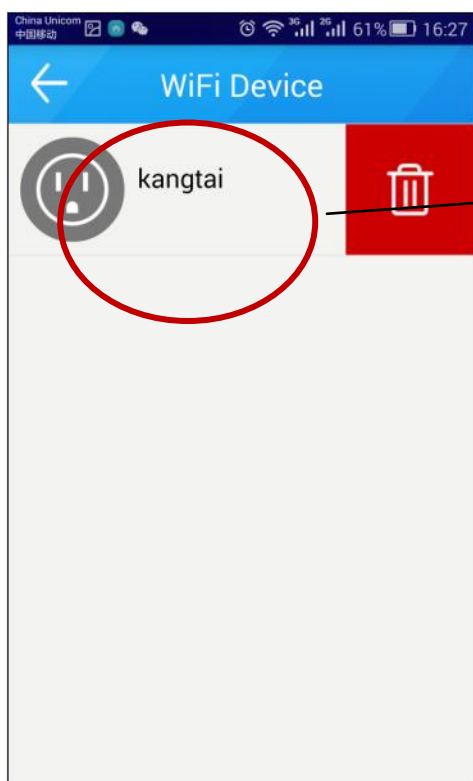

长按此区域，跳出红色提示按钮，即可对设备进行删除。 If you press the device icon for several seconds, you can see the "DELETE" icon and click it to delete the device.


注意：带计量的 WiFi 插座和带 RF 的插座的添加方法与以上操作一致，区别仅在添加显示的设备图标不一样。

2) 配置锁定 Lock Setting

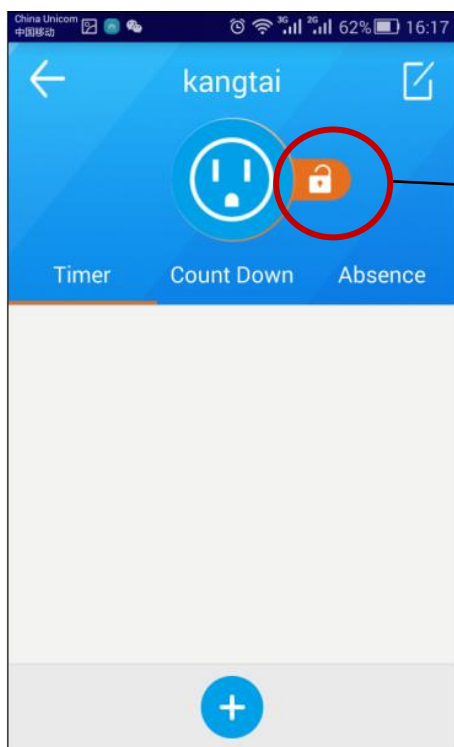

此时表示插座可被配置, 点击此处可改变此状态 If the “ Lock” icon is open status, you can modify the device setting by click the icon.


设备处于开放状态时, 登录到同一个无线路由器所有用户都能搜索并控制该设备

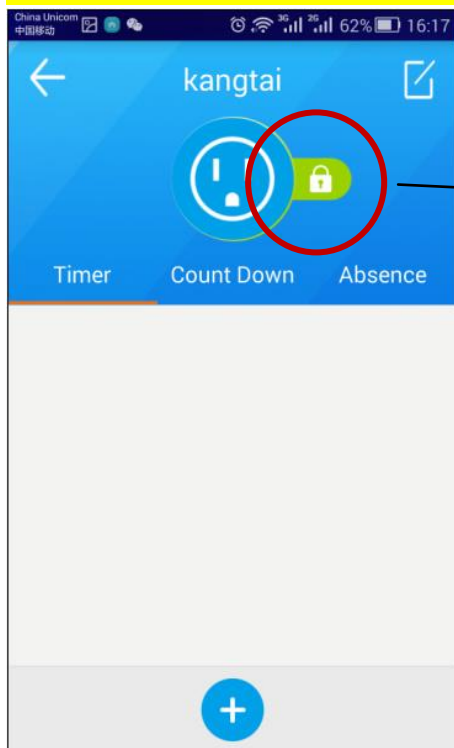

此时表示插座不可被配置, 点击此处可改变此状态 If the “ Lock” icon is close status, you can click the icon to change the current status.

设备处于锁定状态时, 除了已经添加此设备的用户外, 其他人不能搜索和控制该设备

3) 插座编辑 Socket Modify

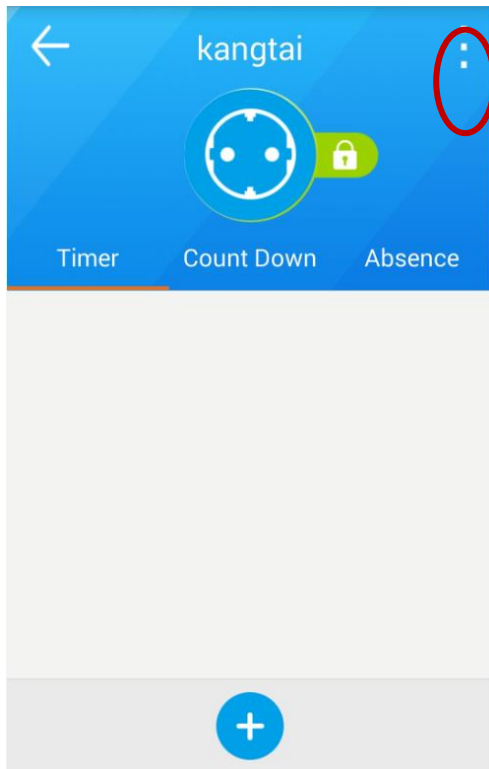


点击此处可编辑插座的识别图，名称等
Click the icon on top right corner to modify the icon of device,device name and so on.



3、设置完成后点击此处，保存编辑
After the setting is finished,you can save it by clicking the icon .

1、在编辑模式下可进行一系列的操作，如修改设备名称，修改设备识别图标，我们以卧室灯泡为例 you can modify device name ,device icon when it is at modify mode.


2、点击此处可添加插座的个性识别图
Please cilci the "ADD" button to add different icon.

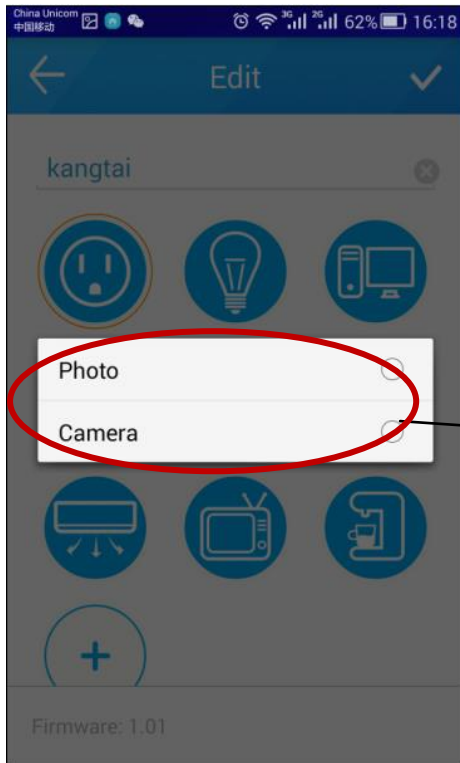

个性识别图获取方式有两种，按需求获取
You can get the individual icon through two ways as your requirement.


4) 定时、倒计时、防盗 Timer, Countdown, Absence

a) 定时 Timer

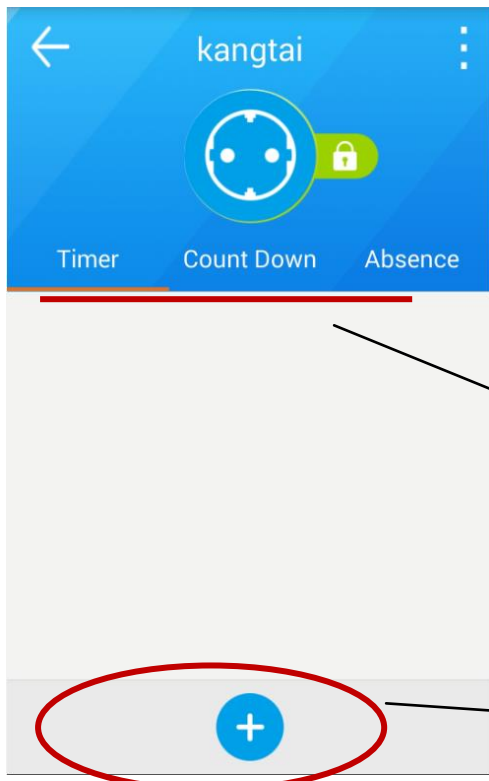


在此页面我们可以对定时、倒计时、防盗等功能进行配置，右图表示此时可以对定时进行配置 We can set the timer ,countdown and absence fuction in this page. The left picture show the operation of timer.

点击此处进入定时配置界面
Click this Icon and enter the time setting scene.

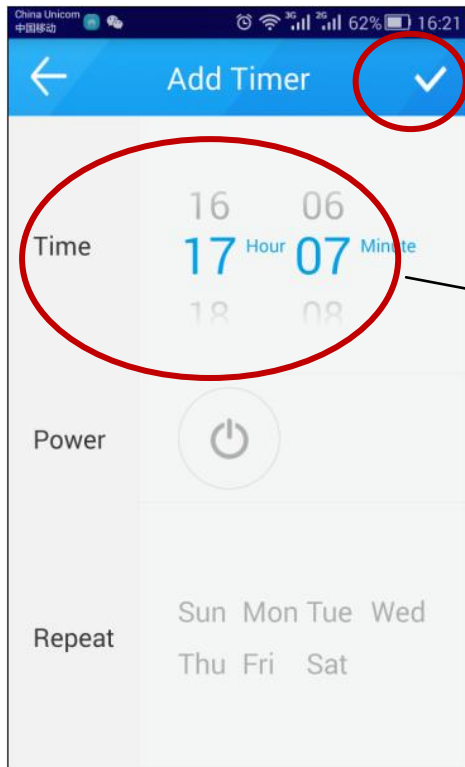


3、设置完成后点击此处，保存编辑
You can click the "SAVE" icon to save the timer setting.

1、左图表示插座定时关闭的时间为 17 点 07 分，关闭 The left picture show the shut down time of socket is 17:07.

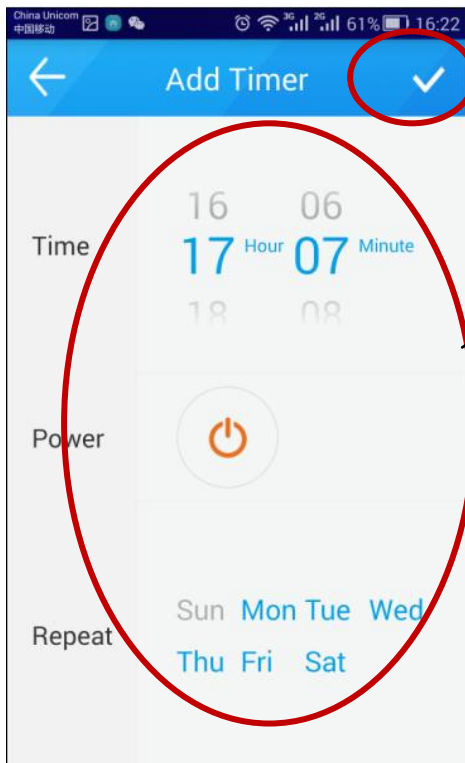


3、设置完成后点击此处，保存编辑
You can click the "SAVE" icon to save the timer setting.

2、左图表示插座定时开启的时间为 17 点 07 分，在周一、二、三、四、五、六重复
The left picture show that the device will repeat to be turned on 17:07 from Monday to Saturday.

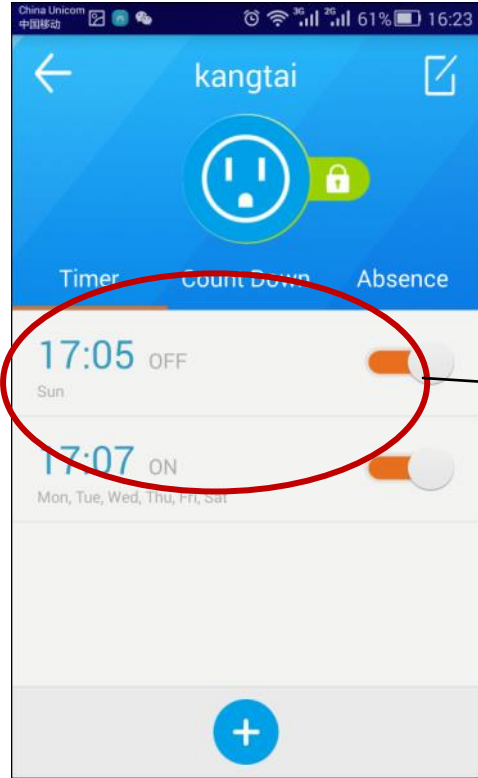


定时设置成功
The timer function is ready.(17:05 turn off/17:07 turn on)

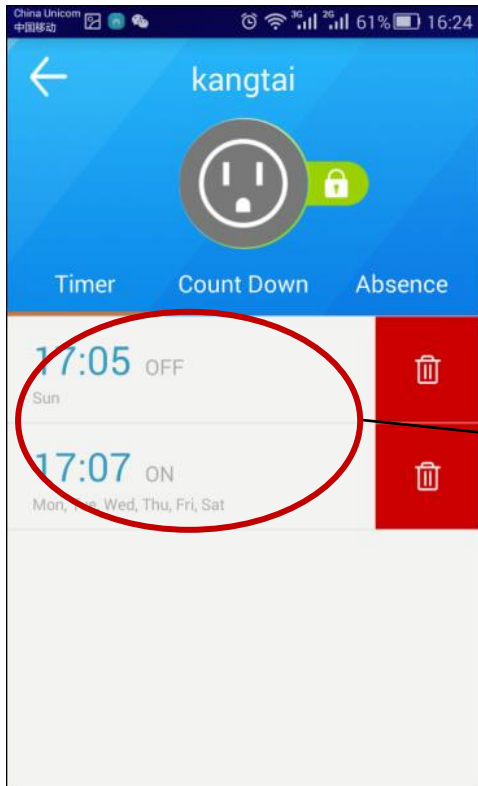


长按此区域，跳出红色提示按钮，即可对定时进行删除 Press this area for several seconds and click the red icon to delete the timer setting.

b)倒计时 Count Down


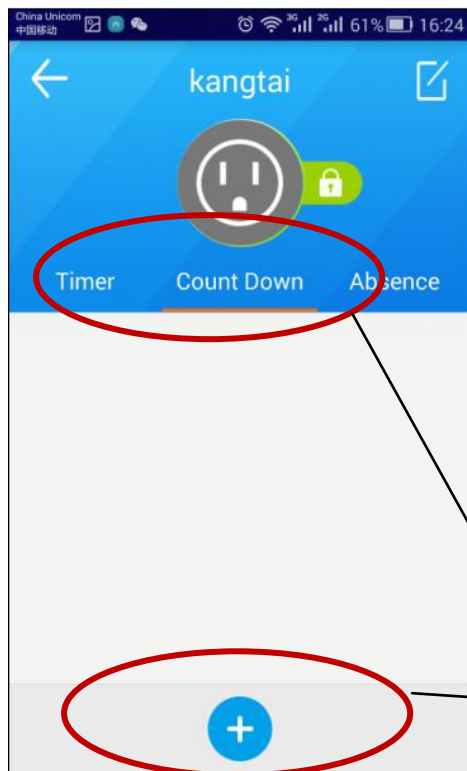


在此状态下，点击此处进入倒计时配置界面 Click the "count down" icon to enter the setting scene.

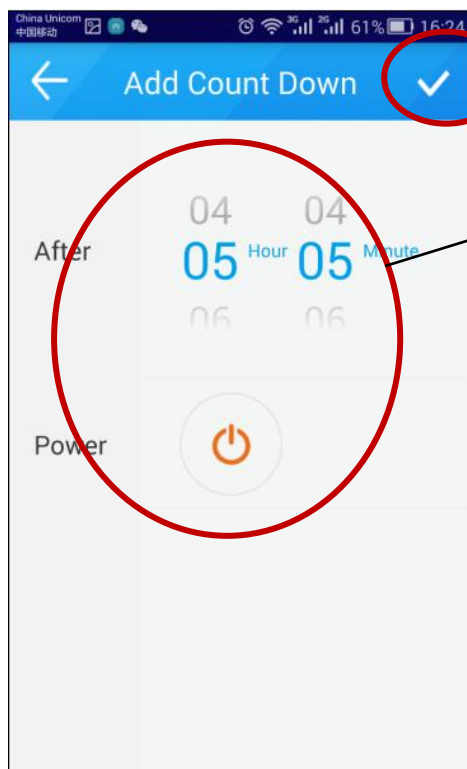


点击此处保存配置
You can click the "SAVE" icon to save the setting.

左图表示插座在 5 小时 5 分钟后开启
The left picture show that the socket will be switched on after five hours ,five minutes .

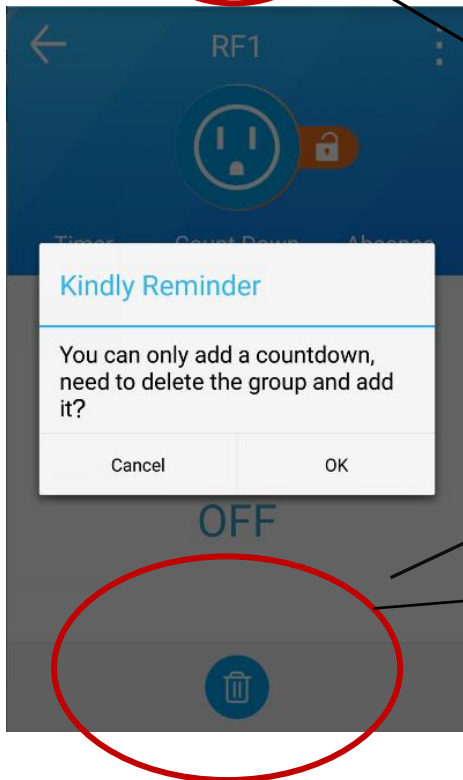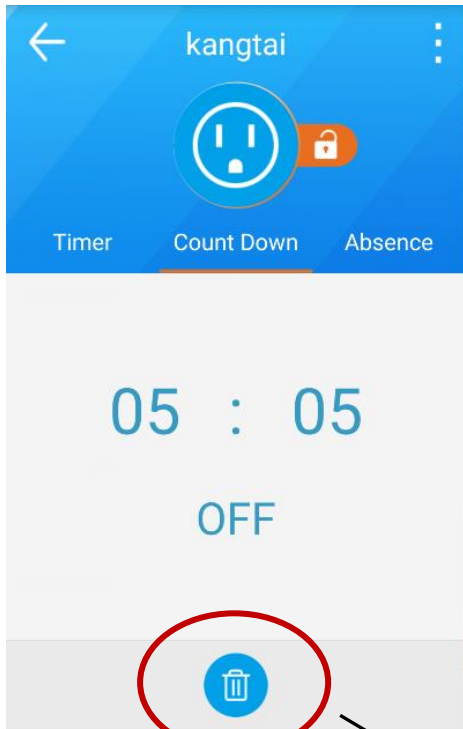


倒计时只允许设置一组, 重复添加会受到相关提示 The Count Down function only can be set to be one group.


b)防盗 Absence

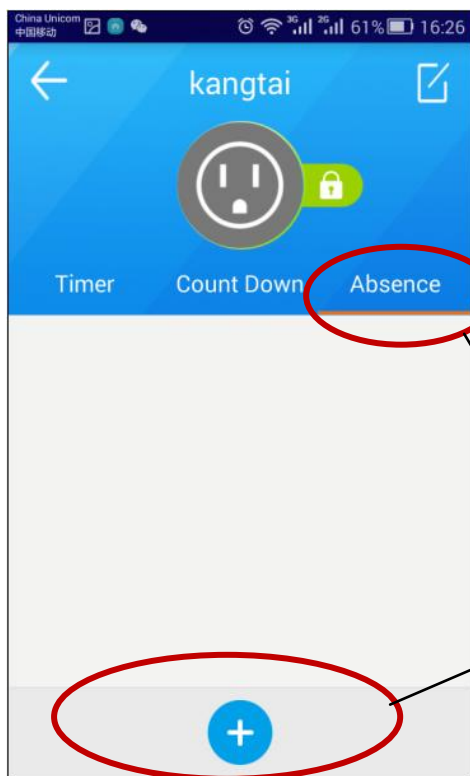


在此状态下，点击此处进入防盗配置界面，
Click the “Absence” icon to enter the
setting scene.

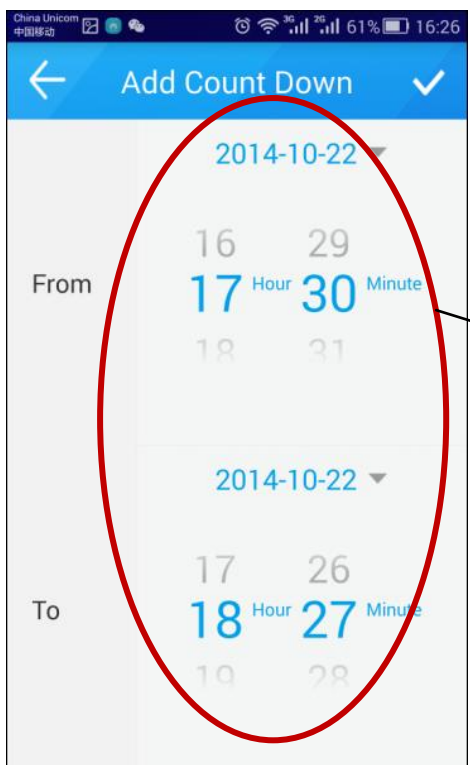


可以设置开始日期、时间、结束日期时间
(结束时间不能再开始时间之前)
You can set the start time,start date, finish
time and finish date. (Attention:the finish
time can not be earlier than the start time)

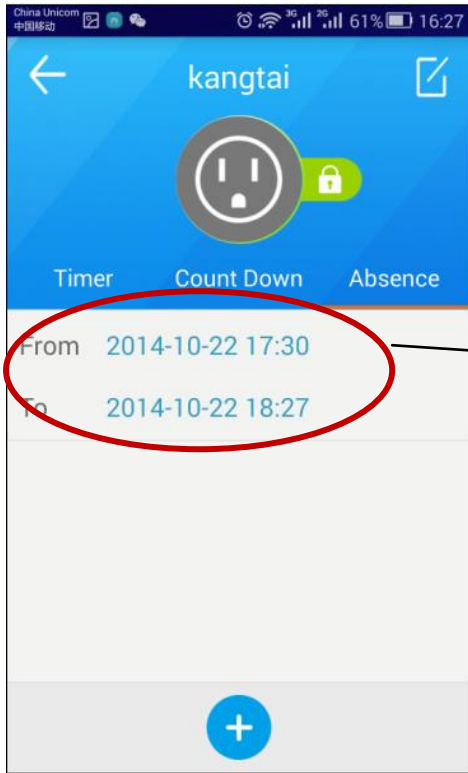

设置成功的状态
You can see the setting information after you save it.

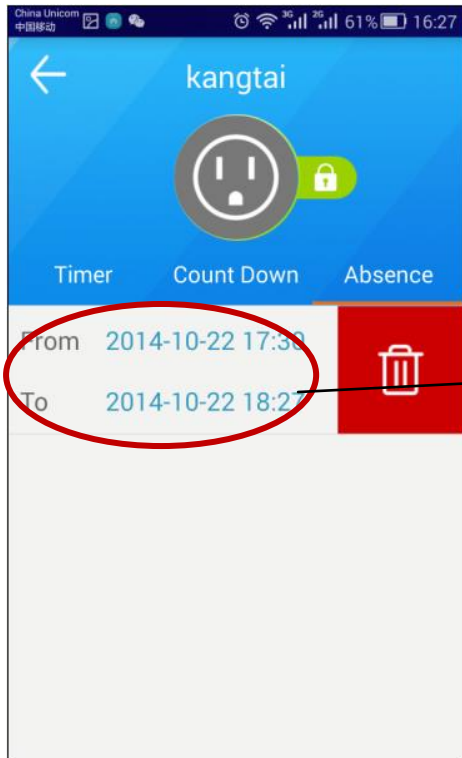


长按此区域，跳出红色提示按钮，即可对定时进行删除，删除后可重新设置新防盗
Press this area for several seconds and click the red icon to delete the Absence. Then you can set the new Absence.

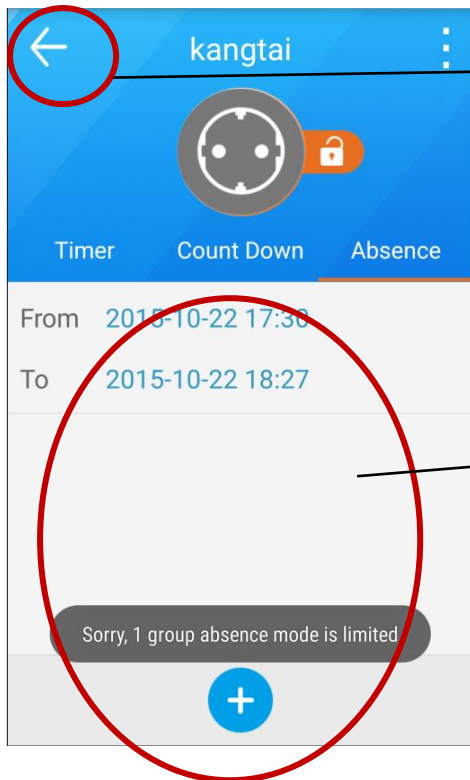

点击返回设备列表界面
Click the "arrow" icon and go
back to the device list.

防盗只允许设置一组，重复添加会受到相关提示
The Absence function only can be setted to
only one group . If you add more than one
group,you can see the sentence as “ sorry, 1
group count down is limited.

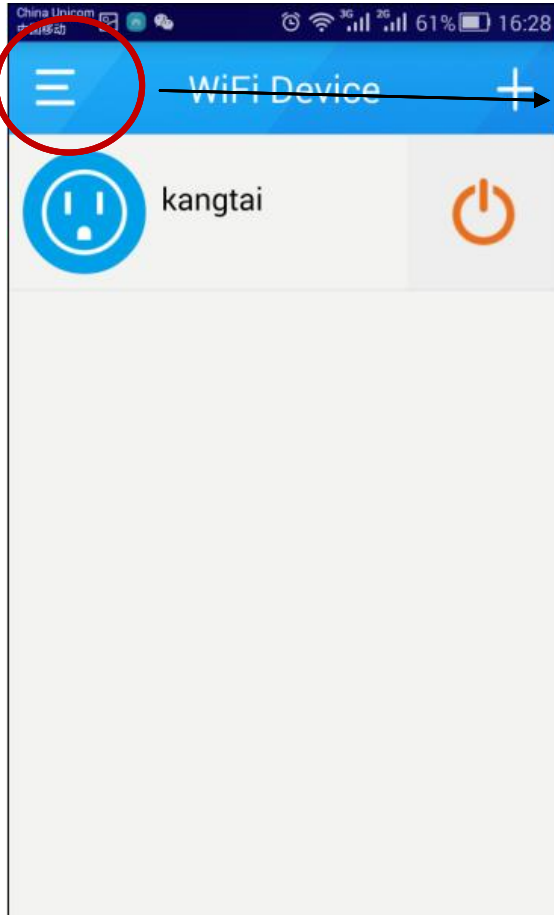


点击此按钮，可以进入菜单界面
Click the symbol as the left picture and go to the menu.

5. 能量信息 Energy Information


根据如下操作，进入当前插座的能量信息界面

According to the following operation, enter the current socket energy information interface.

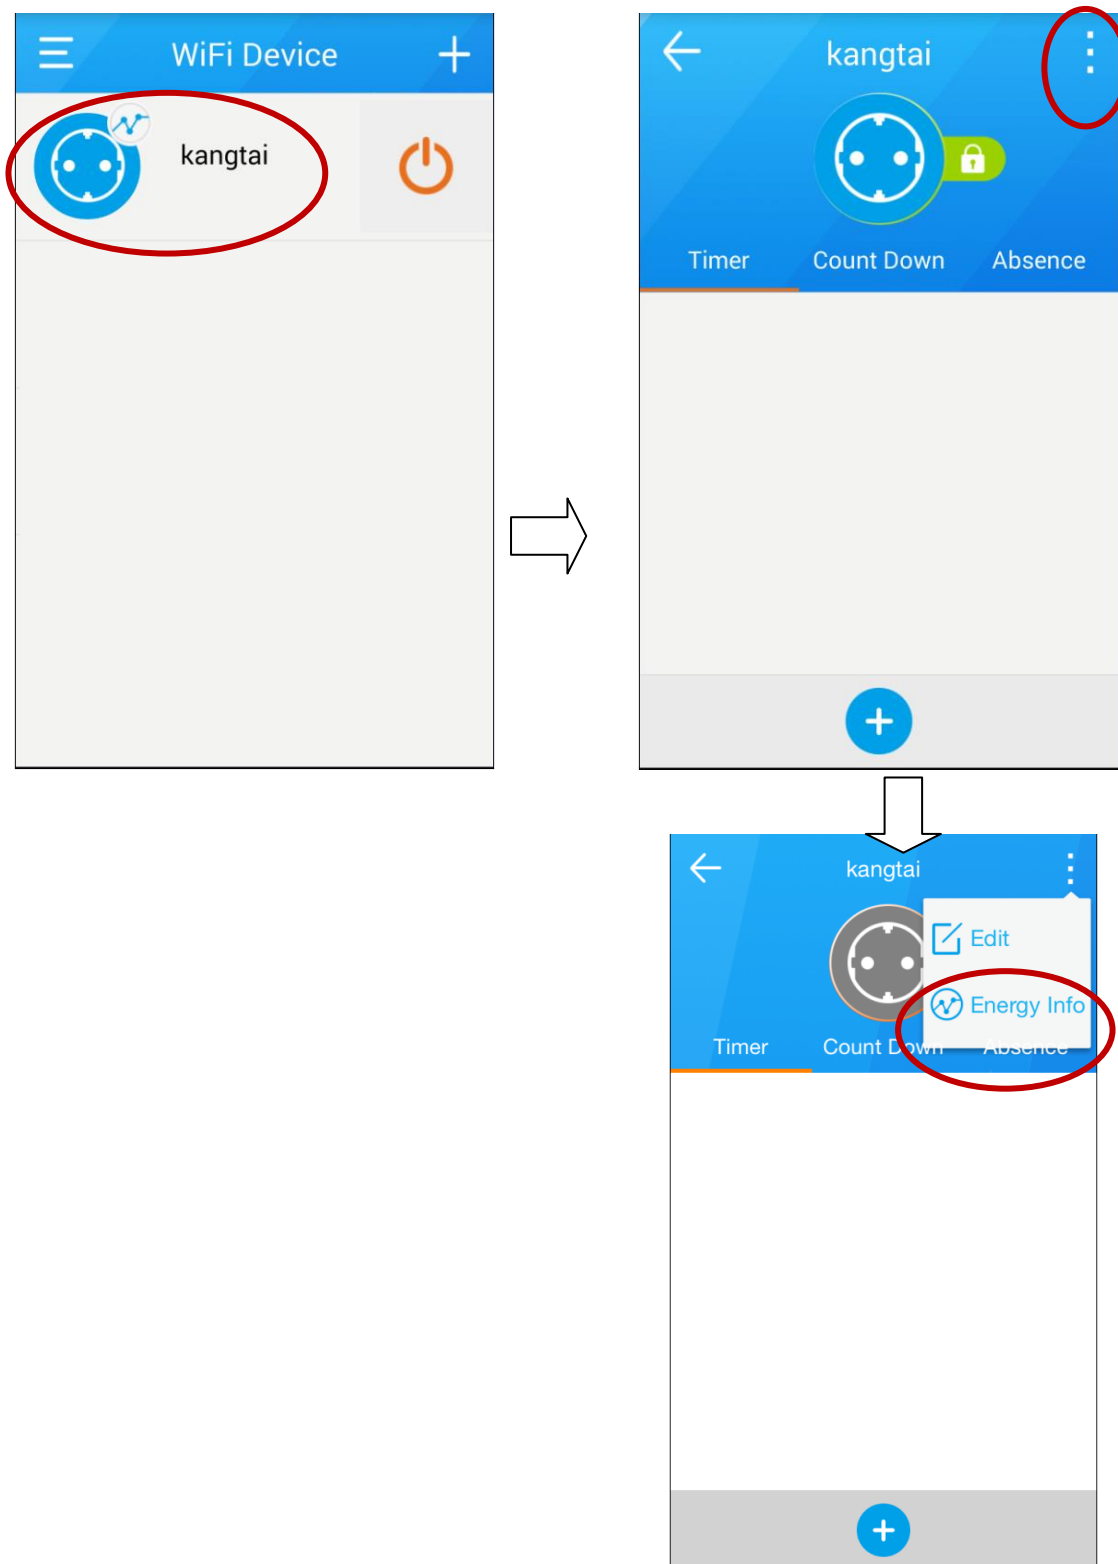


在此界面，你可以查看到当前插座的接入设备的以下能量信息


In the interface, you can see the current socket access devices of the energy information as below.

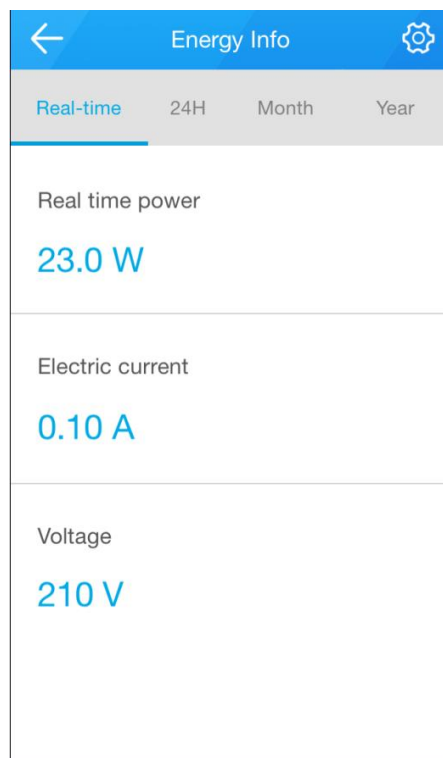


A)实时功率、电压和电流

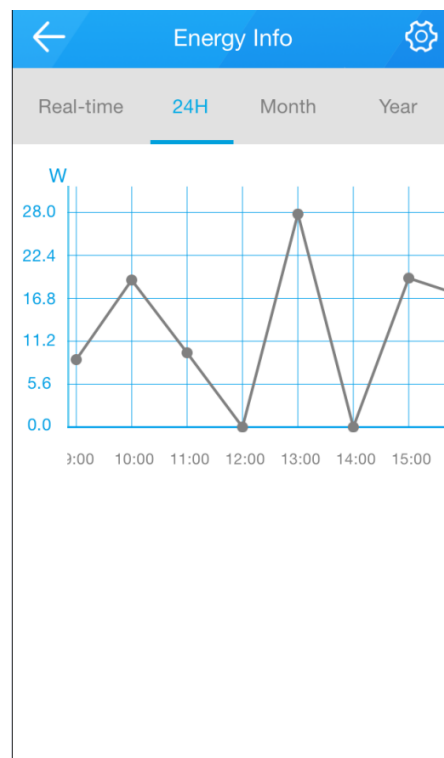

B)最近 24 小时能量消耗

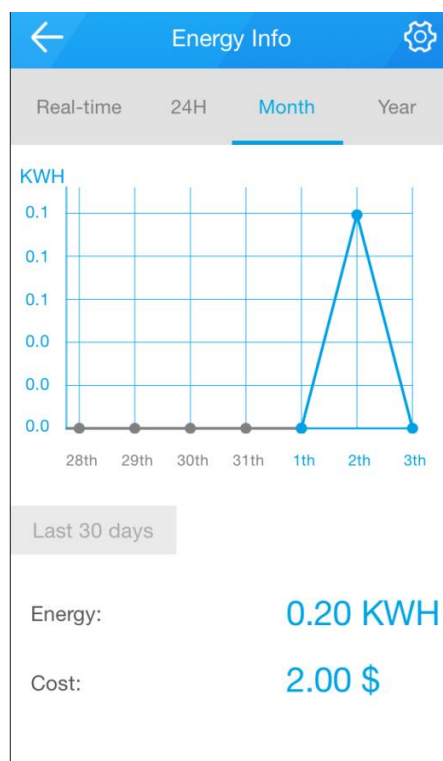


C)最近一个月的能量消耗和费用

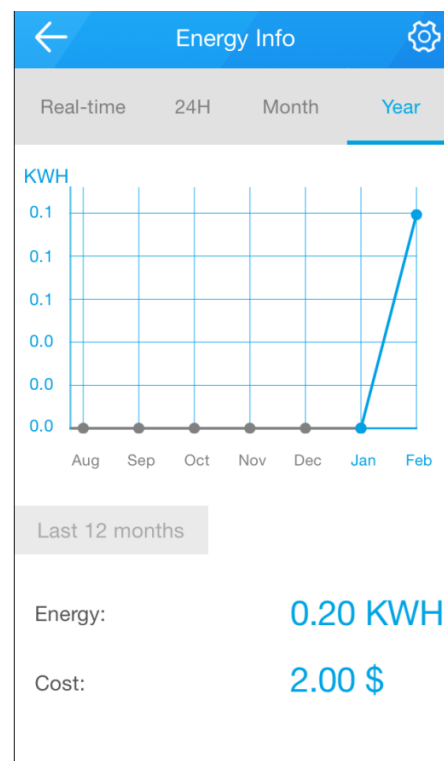

D)最近一年的能量消耗和费用


如需设置每千瓦时的费用，请按以下操作

If you want to set the cost per KWH, please click the following operation

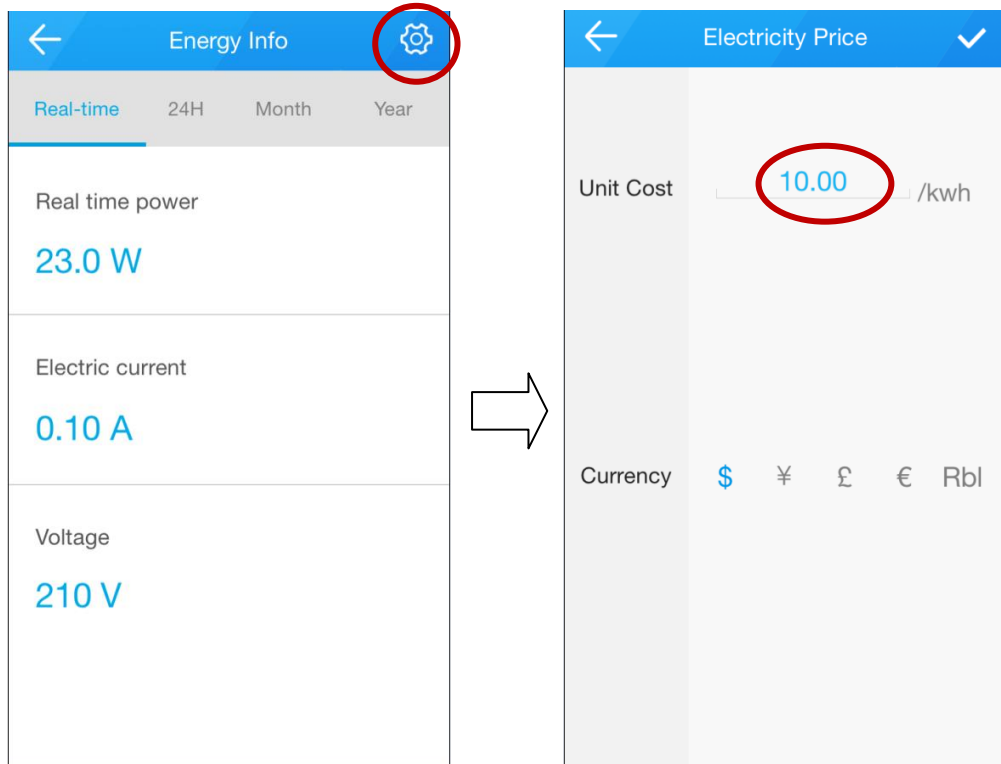


6. RF 设备配置 RF Device Setting


1) 新增 RF 设备 add new RF Device

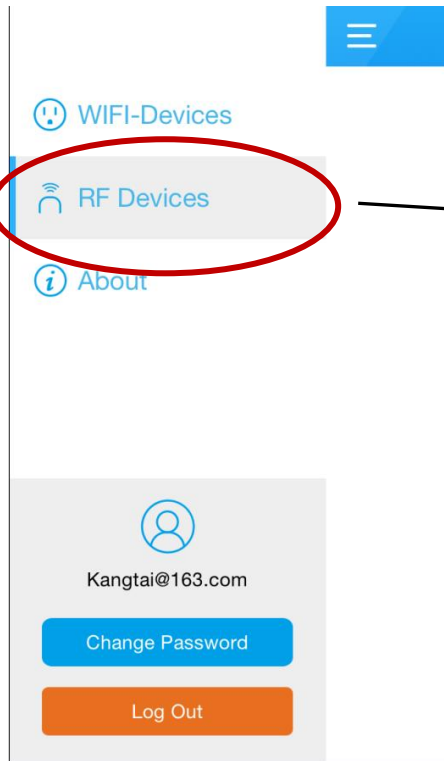

点击此按钮，可以进入 RF 界面
Click the symbol as the left picture and go to the RF page.

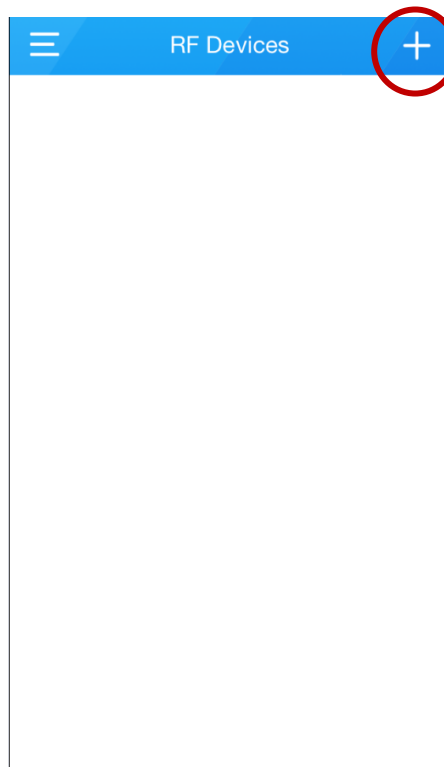

在页面的右上角点击此按钮，增加一个 RF 设备。
You can click the button "cross symbol" to add a RF device.

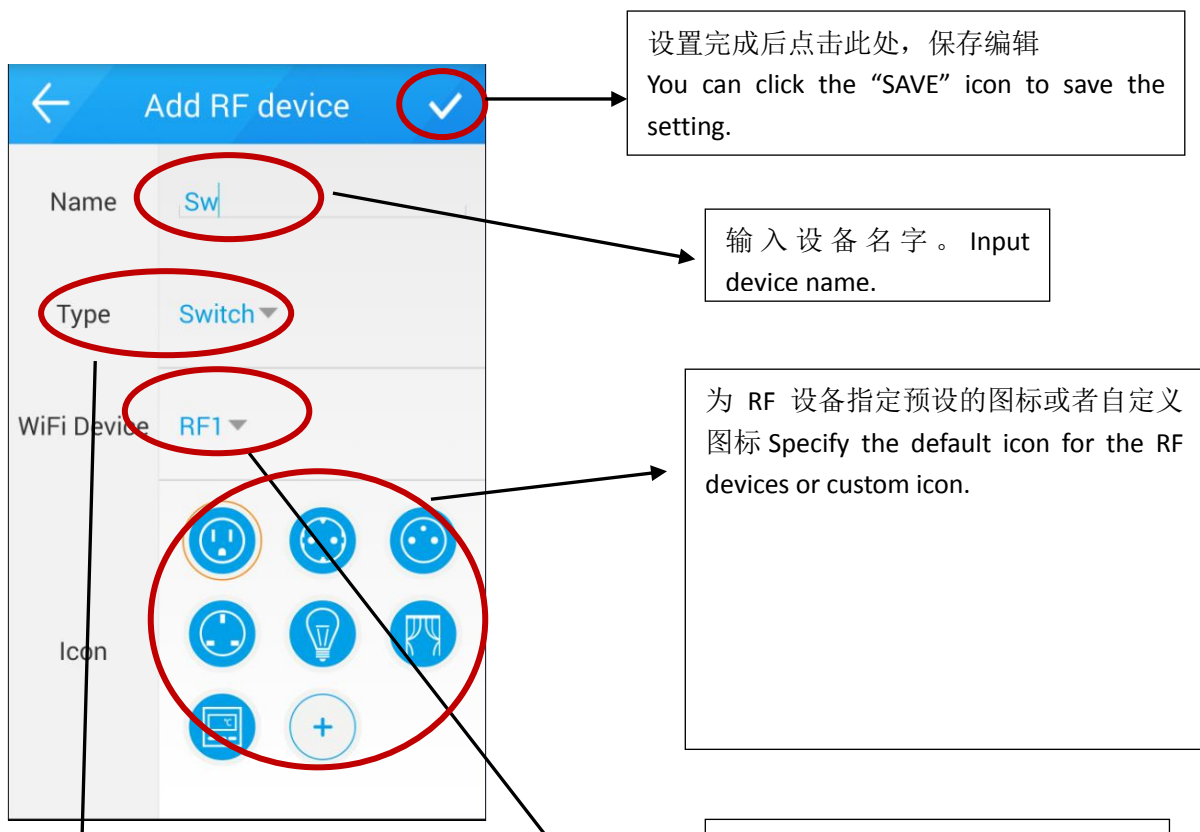



设置完成后点击此处，保存编辑
You can click the "SAVE" icon to save the setting.

输入设备名字。Input device name.

为 RF 设备指定预设的图标或者自定义图标 Specify the default icon for the RF devices or custom icon.

选择 RF 设备的设备类型
Choose RF device type.


指定哪个 WiFi 插座来转发 RF 信号
To specify which WiFi socket forward to RF signal.

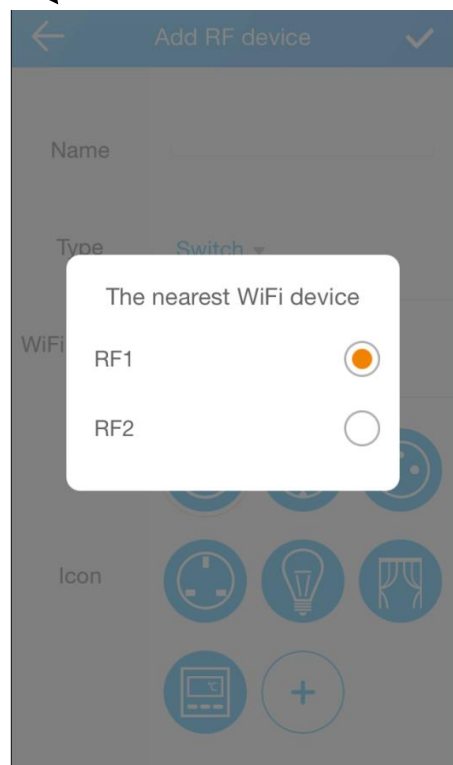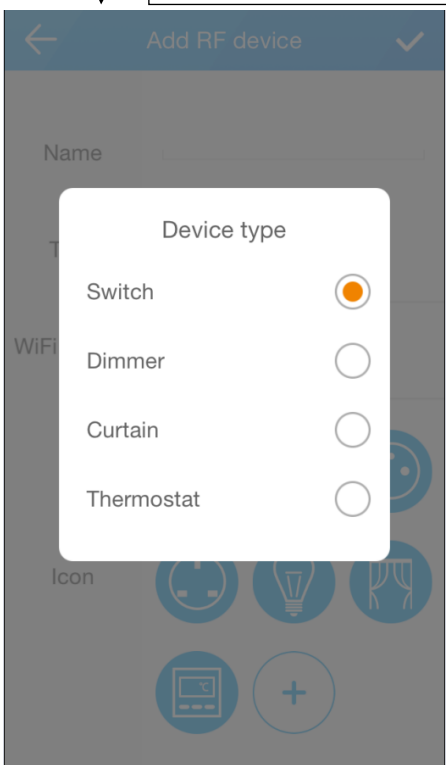




跳出此界面，表示已经在 APP 中成功新增 RF 设备。下一步你需将此设备与实际产品进行配对才能实现控制。Jump out the page, says it has successful to add the new RF device in the APP. Next step you need to match the device and the actual products to achieve control.

2) 设备配对 Device Pairing

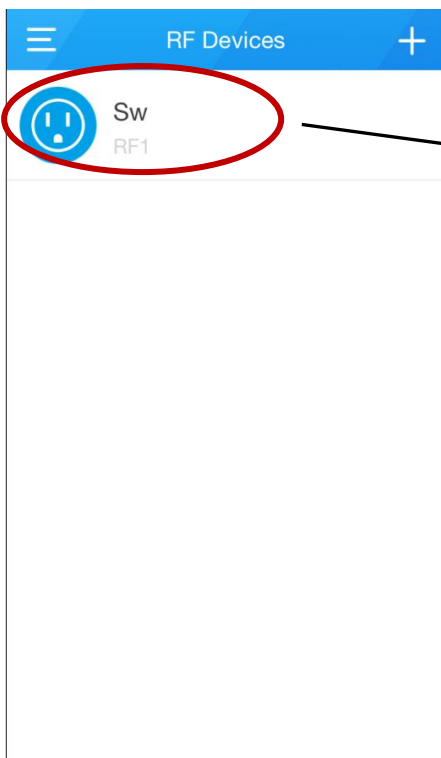


点击此区域可对进入 RF 设备的设置页面
You can click the device symbol as the left picture to enter setting page of RF device.

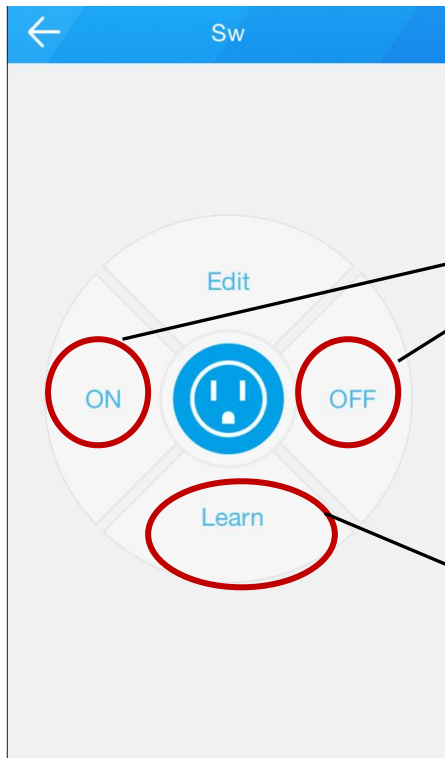


学习成功后, 可以使用 ON/OFF 按键来控制设备。 After pairing finished, we can control the device by clicking the ON/OFF symbol.

请将需要配对的 RF 设备进入配置状态 (请参见 RF 设备的使用手册) 后, 点击“Learn”。 Pair the RF device by clicking Learn icon when the RF device is on learning mode.
Remarks: Please refer to RF device instruction about how to enter LEARNING mode.

3) 设备操作 Operation

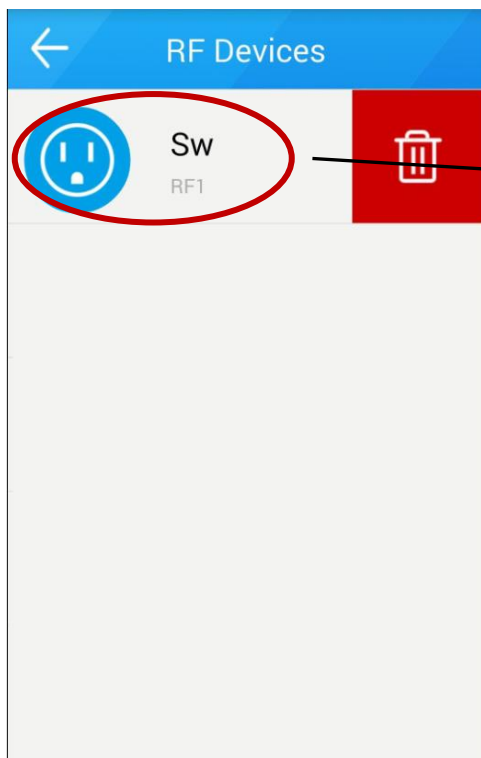

长按此区域, 跳出红色提示按钮, 即可对设备进行删除 Press the device icon for several seconds until you see the “DELETE” icon and then click it to delete the device.

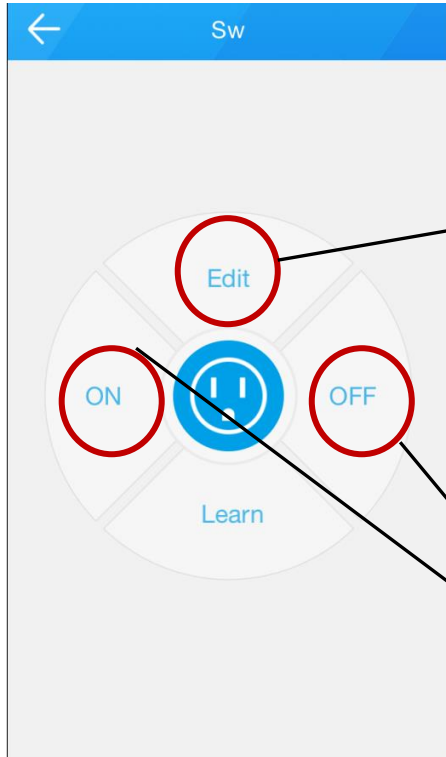

点击此按键, 进入 RF 设备配置界面。Click the symbol and go to RF device configuration page.


这两个按键是控制 RF 设备的按键, 当设备类型不一样时按键功能也会随之变化:

- A、当 RF 设备类型为 Switch 或者 Dimmer 时, 这两个按键为 ON/OFF.
- B、当 RF 设备类型为 Curtain 时, 这两个按键为 Up/Down.
- C、当 RF 设备类型为 Thermostat 时, 这两个按键为 High/Low.


The two symbols are to control RF device. When device type is different, the symbol function will change.

- a) When RF device type as Switch or Dimmer, these two symbols are ON/OFF.
- b) When RF device type as Curtain, these two symbols are Up/Down.
- c) When RF device type as Thermostat, these two symbols are High/Low.

4) RF 设备定时 Timer of RF device

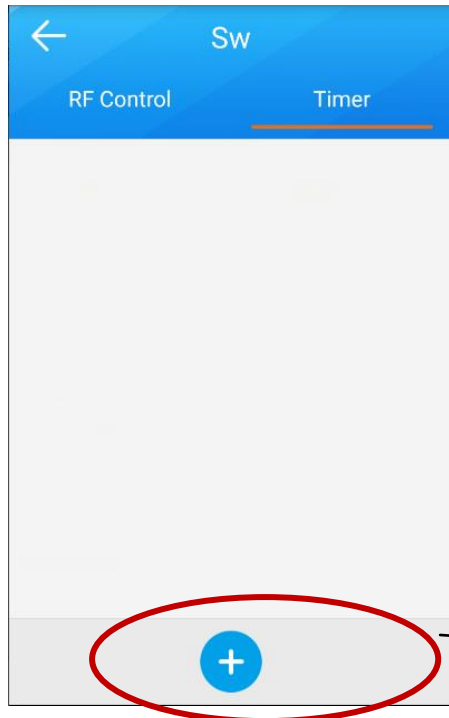


点击此图标进入定时界面
Click this Icon and enter the timer setting scene.

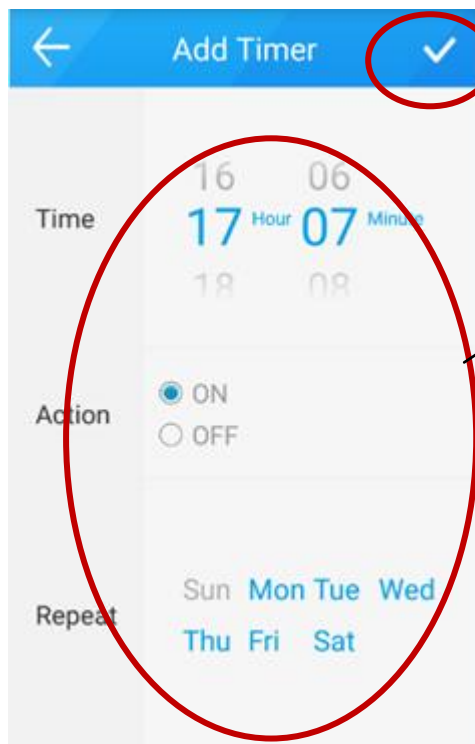


点击此处图标保存设置
You can click the "SAVE" icon to save the timer setting.

此图表明 RF 设备将每周的周一到周六的 17:07 打开
The left picture showing the RF device will repeat turning on 17:07 from Monday to Saturday.

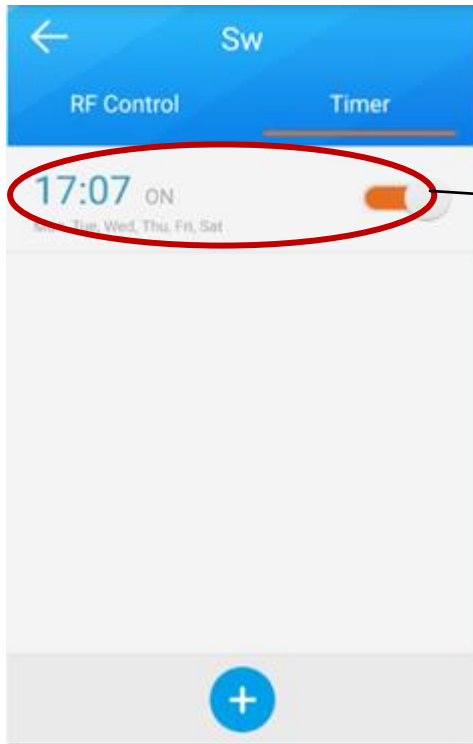

定时功能启用
The timer function is ready.

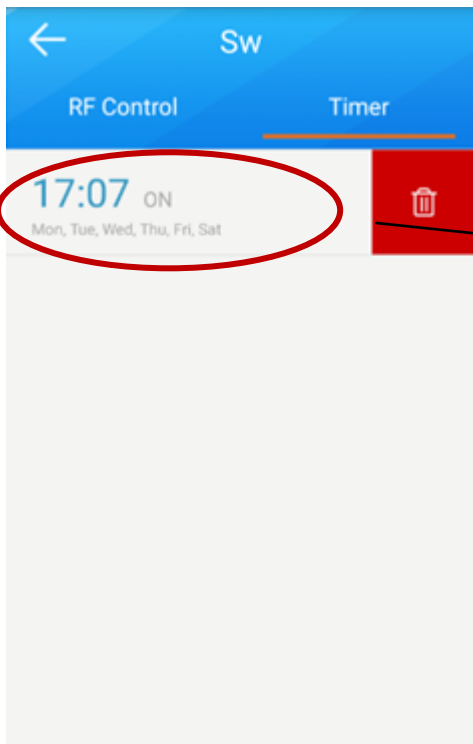


长按此区域，跳出红色提示按钮，即可对设备进行删除 Press the device icon for several seconds until you see the "DELETE" icon and then click it to delete the timer task.

7. 修改密码 Change Password




在此选项下，显示账号信息，可对账号进行如修改密码，注销退出等操作 You can see the ID information under this option and you can revise the password ,system logout and so on .

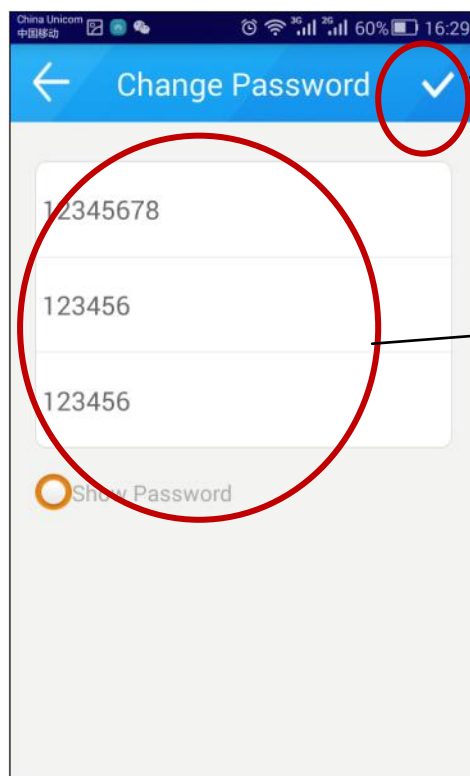


2、输入完成后点击此处，保存修改
You can click the "SAVE" button to save the revised password .

1、输入正确的原密码、再输入两次新密码，修改密码 Firstly input the old password,then input the new password twice to modify the password.

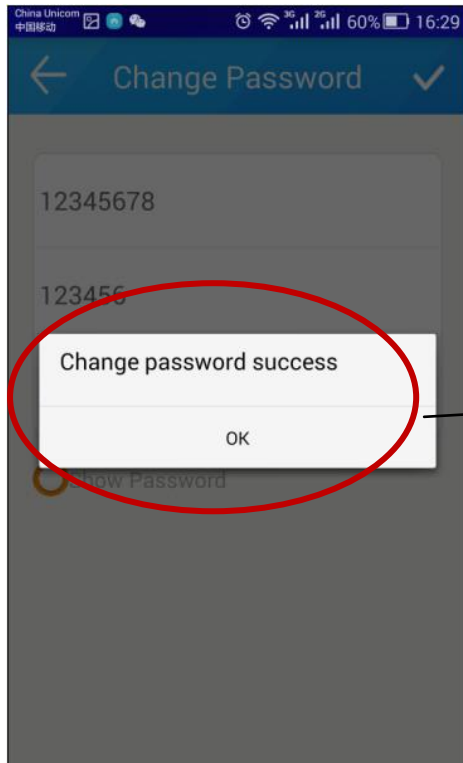


密码修改成功的提示框，点击 OK 自动返回
After the password is revised,you can click
"ok" button to go back automatically.

8. 注销退出 Logout

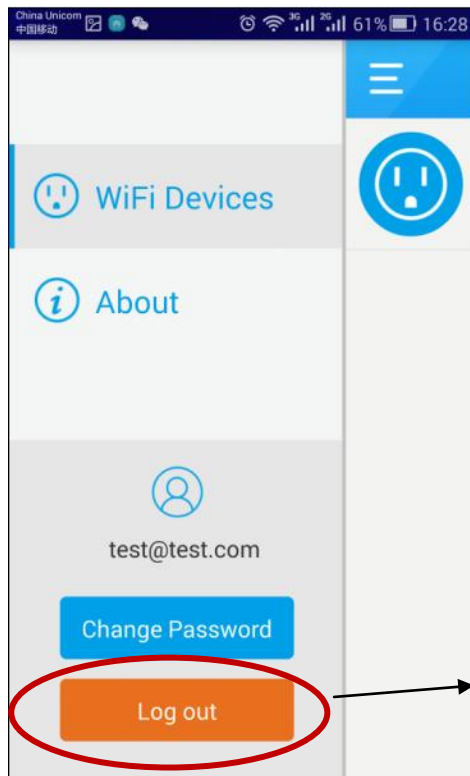

如需登陆新用户或退出，请点击注销退出
If you need to login the new ID, please click the "log out" button to quit.

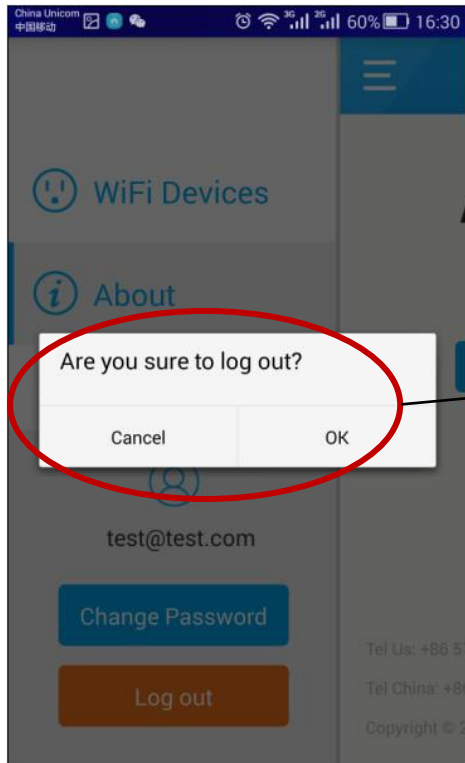

点击取消则留在当前界面,在跳出的提示框选择确定,即可返回登陆界面
If you click the "cancel" button, you will stay in current page. If you click the "OK" button, you will go back to the log in page.

