



Read this document carefully before using this device. The guarantee will be expired by device damages if you don't attend to the directions in the user manual. Also we don't accept any compensations for personal injury, material damage or capital disadvantages.

## ENDA ET2011 PID TEMPERATURE CONTROLLER

Thank you for choosing ENDA ET2011 temperature controller.

- \* 77 x 35mm sized.
- \* Selectable dual setpoint.
- \* Selectable thermocouple types or PT100 input. (Specify at order).
- \* Automatic calculation of PID parameters. (SELFTUNE).

**⚠** Selftune for automatic PID calculation or manually enter PID parameters if known.

- \* Soft-Start feature.
- \* Zero point input shift.
- \* C/A2 Relay output programmable as alarm or control output.
- \* Selectable SSR control output.
- \* Selectable heating/cooling control.
- \* In the case of sensor failure, manual control can be selected.
- \* CE marked according to European Norms.



**RoHs**  
Compliant

### TECHNICAL SPECIFICATIONS

| Input type                   | Temperature range |                  | Accuracy                         |
|------------------------------|-------------------|------------------|----------------------------------|
|                              | °C                | °F               |                                  |
| PT100 Resistance thermometer | -99.9...300.0 °C  | -99.9...543.0 °F | ± 0,5% (of full scale) ± 1 digit |
| PT100 Resistance thermometer | -200...600 °C     | -328...1112 °F   | ± 0,5% (of full scale) ± 1 digit |
| J (Fe-CuNi) Thermocouple     | 0... 600°C        | +32... +1112°F   | ± 0,5% (of full scale) ± 1 digit |
| K (NiCr-Ni) Thermocouple     | 0...1300°C        | +32... +2372°F   | ± 0,5% (of full scale) ± 1 digit |
| T (Cu-CuNi) Thermocouple     | 0... 400°C        | +32... +752°F    | ± 0,5% (of full scale) ± 1 digit |
| S (Pt10Rh-Pt) Thermocouple   | 0...1700°C        | +32... +3092°F   | ± 0,5% (of full scale) ± 1 digit |
| R (Pt13Rh-Pt) Thermocouple   | 0...1700°C        | +32... +3092°F   | ± 0,5% (of full scale) ± 1 digit |

#### ENVIRONMENTAL CONDITIONS

|                             |   |
|-----------------------------|---|
| Ambient/storage temperature | 0 ... +50°C/-25... +70°C (with no icing)  |
| Max. Relative humidity      | Relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% relative humidity at 40°C. |
| Rated pollution degree      | According to EN 60529      Front panel : IP65<br>Rear panel : IP20                                      |
| Height                      | Max. 2000m  |



Do not use the device in locations subject to corrosive and flammable gases.

#### ELECTRICAL CHARACTERISTICS

|                     |   |
|---------------------|---|
| Supply              | 230V AC +%10 -%20, 50/60Hz or 24V AC %10, 50/60Hz   |
| Power consumption   | Max. 5VA  |
| Wiring              | Power connector: 2.5mm <sup>2</sup> screw-terminal, Signal connector: 1,5mm <sup>2</sup> screw-terminal connection. |
| Line resistance     | Max. 100ohm   |
| Data retention      | EEPROM (minimum 10 years)   |
| EMC                 | EN 61326-1: 2012  |
| Safety requirements | EN 61010-1: 2010 (Pollution degree 2, overvoltage category II)  |

#### OUTPUTS

|                           |  |
|---------------------------|--|
| C/A2 output               | Relay : 250V AC, 8A (for resistive load), Selectable as NO+NC Control or Alarm2 output.<br>Relay : 250V AC, 16A (for resistive load), Selectable as NO Control or Alarm2 output. |
| SSR output                | Max 20mA 12Volt (as control output)  |
| Life expectancy for relay | Mechanical 30.000.000; Electrical 100.000 operation. 250V AC, 8A and 16A (resistive load).   |

#### CONTROL

|                   |   |
|-------------------|---|
| Control type      | Single set-point and alarm control                                    |
| Control algorithm | On-Off / P, PI, PD, PID (selectable)                                  |
| A/D converter     | 12 bit  |
| Sampling time     | 100ms   |
| Proportional band | Adjustable between 0% and 100%. If Pb=0%, On-Off control is selected. |
| Control period    | Adjustable between 1 and 250 seconds                                  |
| Hysteresis        | Adjustable between 1 and 50°C/F                                       |
| Output power      | The ratio of power at a set point can be adjusted between 0% and 100% |

#### HOUSING

|                    |  |
|--------------------|--|
| Housing type       | Suitable for flush-panel mounting according to DIN 43 700. |
| Dimensions         | W77xH35xD71mm  |
| Weight             | Approx. 200g (after packing)                               |
| Enclosure material | Self extinguishing plastics.                               |




While cleaning the device, solvents (thinner, benzine, acid etc.) or corrosive materials must not be used.




SİSEL MÜHENDİSLİK ELEKTRONİK SAN. VE TİC. A.Ş.  
Gülfali Mah. Barbaros Cad. No:18 Y.Dudullu 34775  
ÜMRANIYE/İSTANBUL-TURKEY  
Tel : +90 216 499 46 64 Pbx. Fax : +90 216 365 74 01  
url : www.enda.com.tr




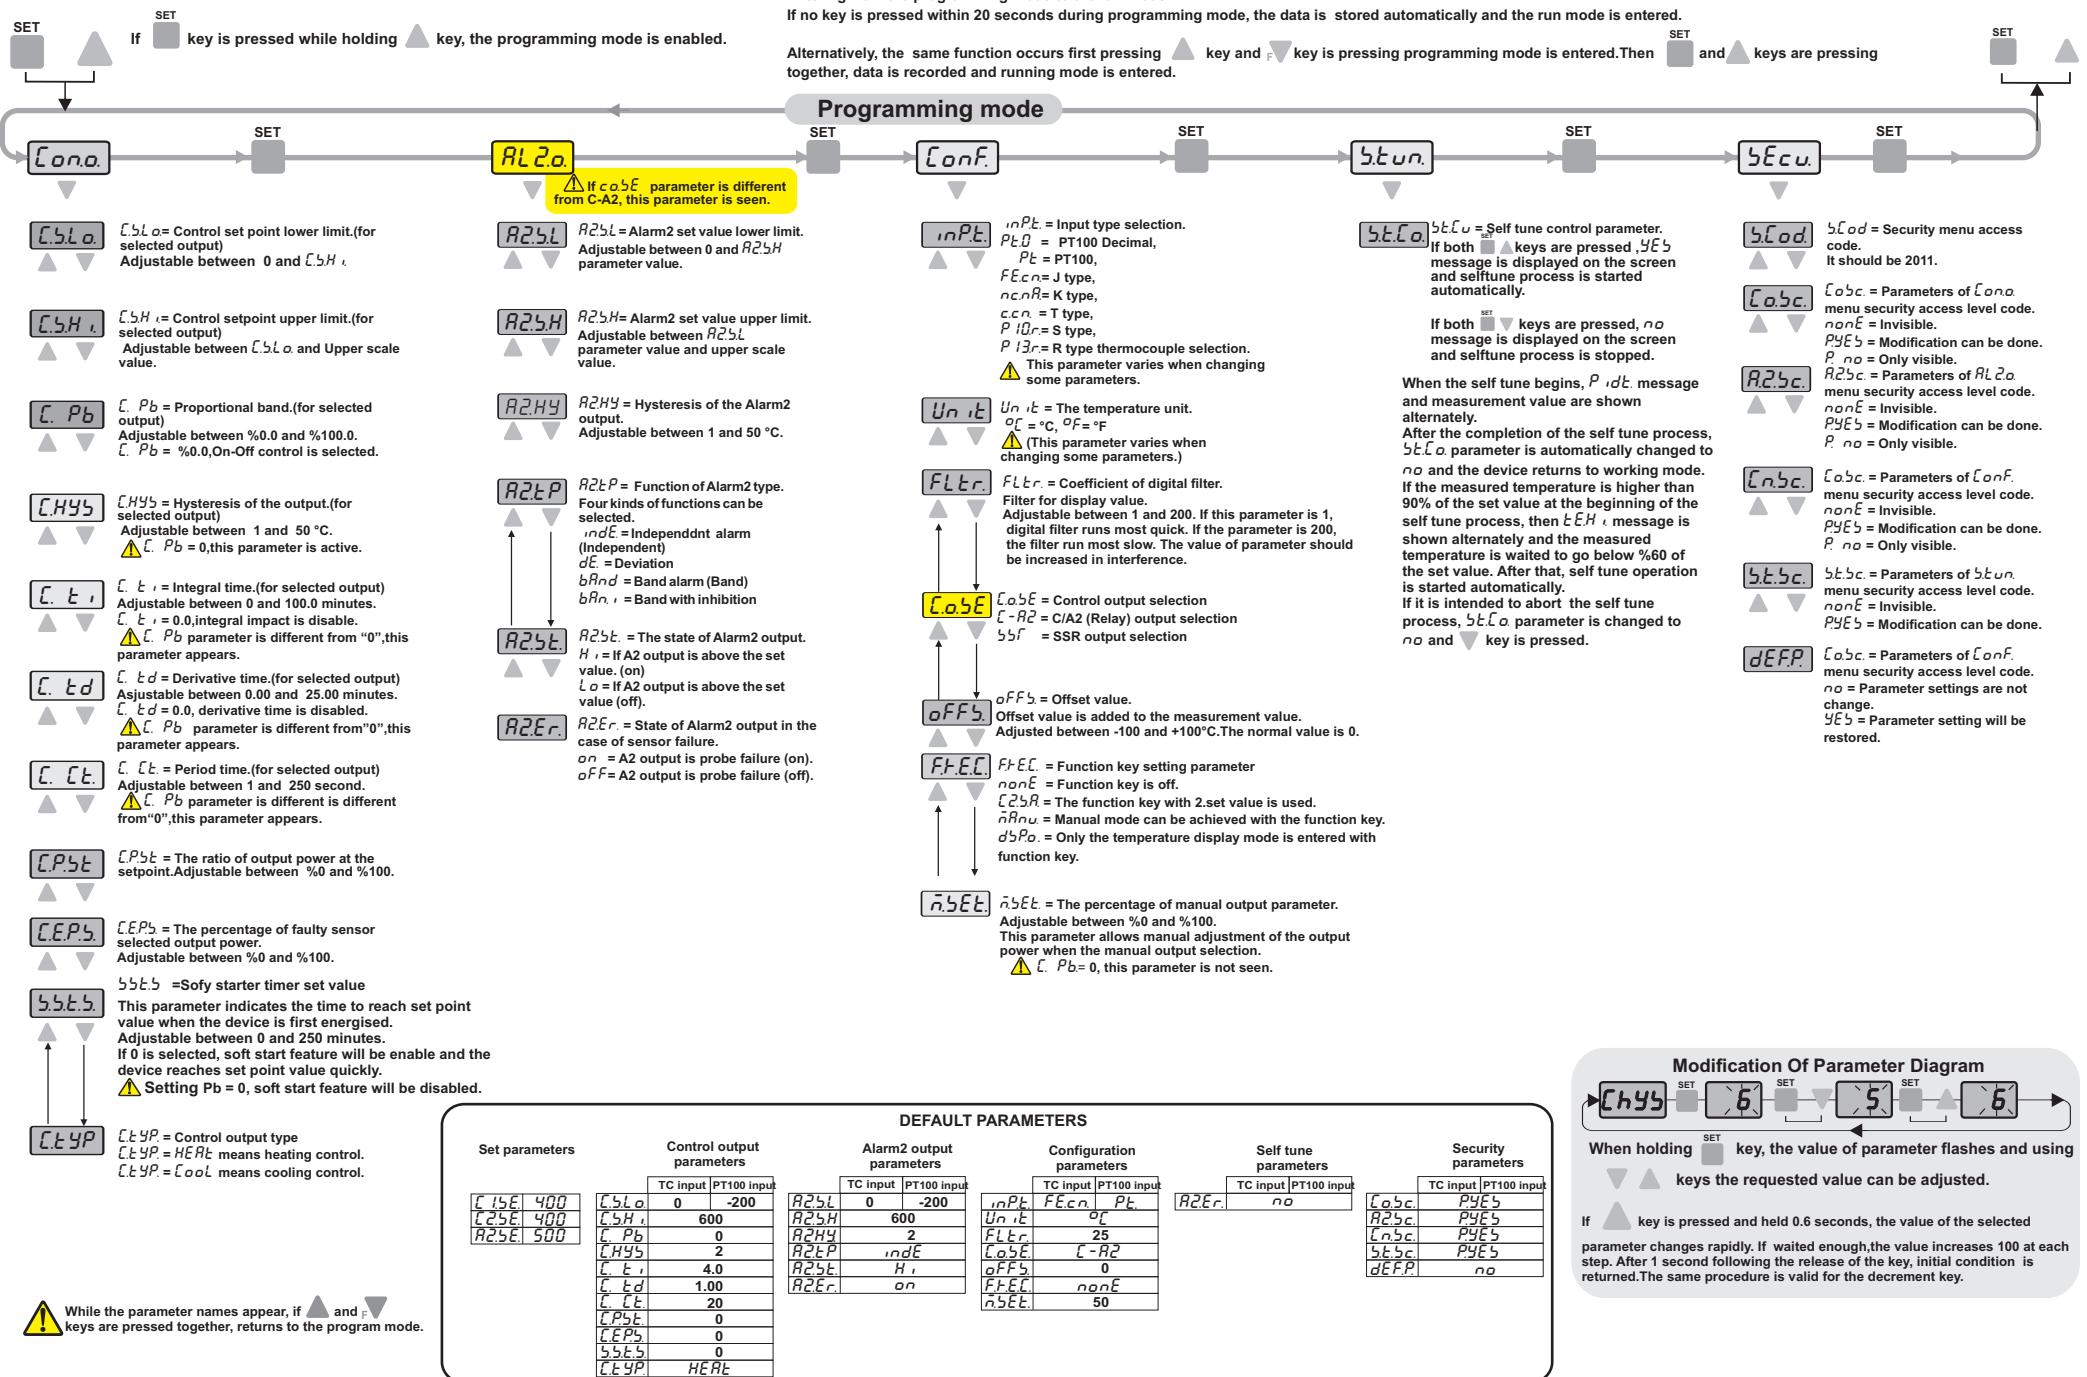


## TERMS

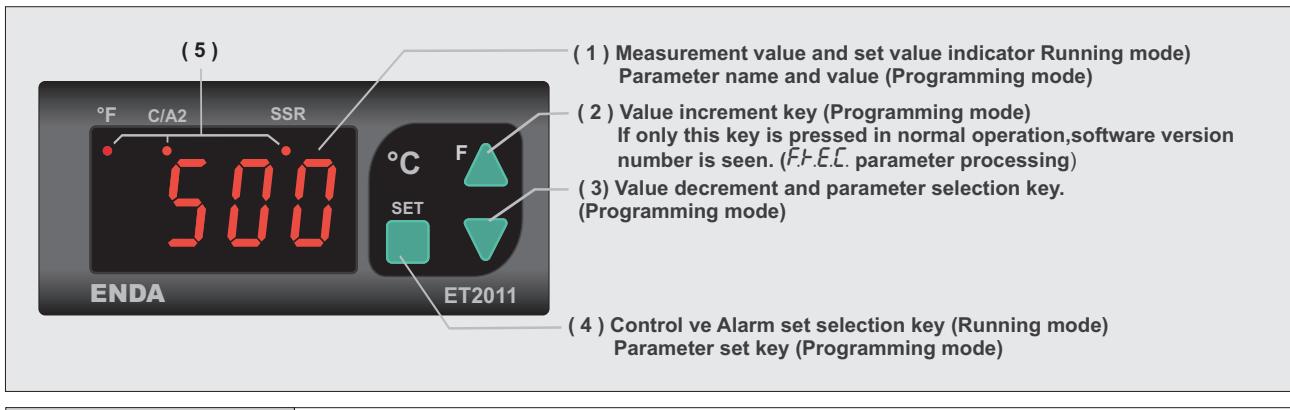


|                              |  |
|------------------------------|--|
| <b>(1) PV and SV display</b> | 7 segment, 4 digits red LED display                  |
| <b>Character heights</b>     | 12 mm  |
| <b>(2),(3),(4) Keypad</b>    | Micro switch   |
| <b>(5) State indicator</b>   | For control, Alarm1 and SSR outputs 3 digits red LED |

## ALARM2 OUTPUT TYPES

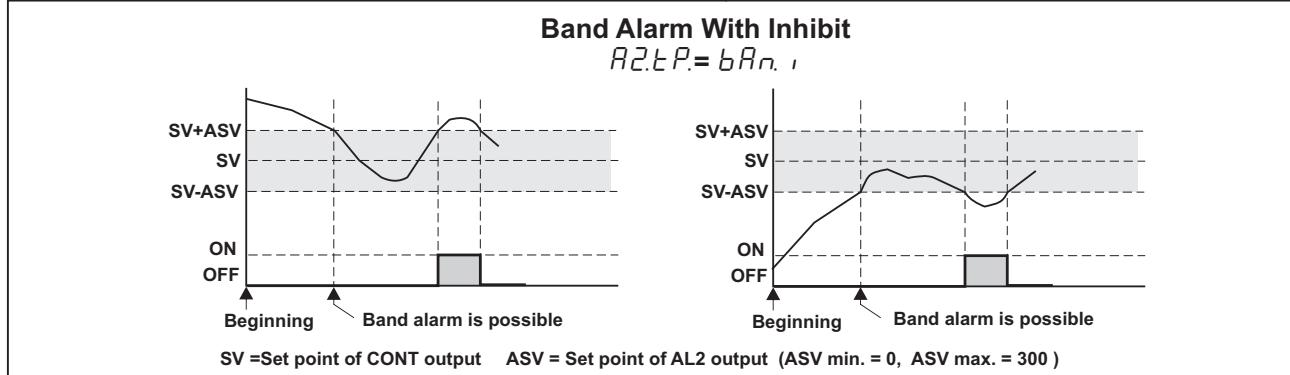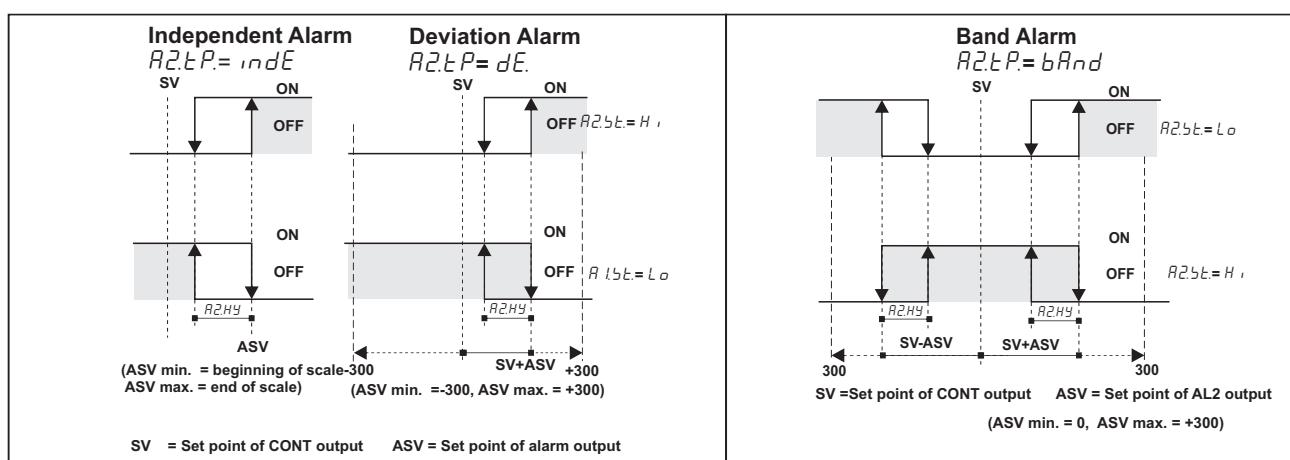




## MODIFICATION OF CONTROL AND ALARM SET POINTS

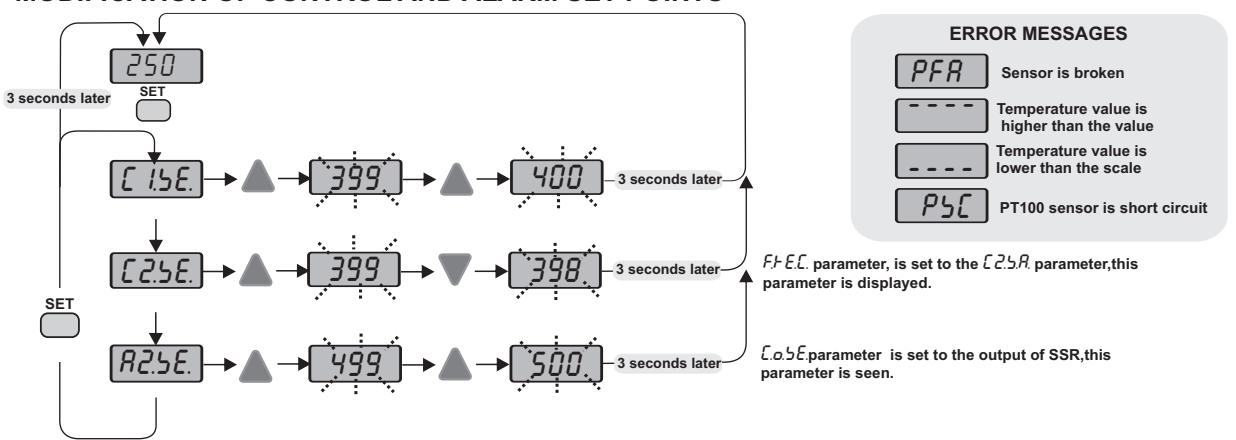

## DIMENSIONS



**For removing mounting clamps :**  
- Push flush mounting clamps in direction 1 as shown in the figure below.  
Then pull out the clamps in direction 2 .

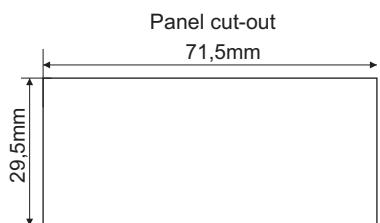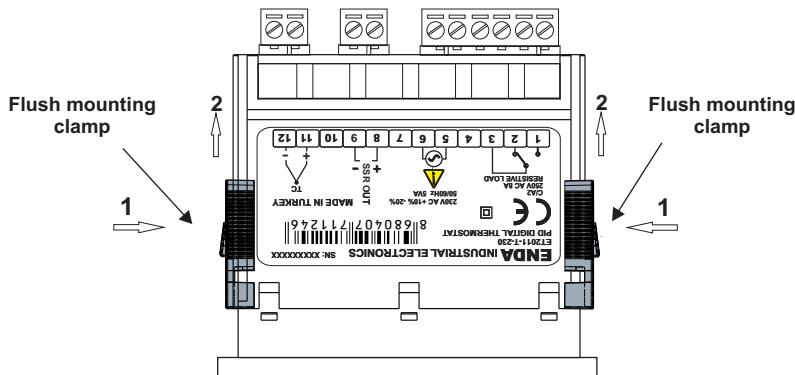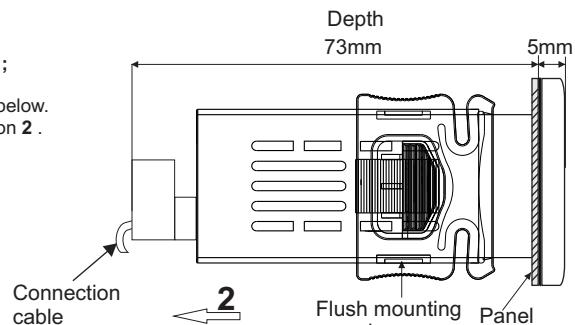

**Note :**  
1) Panel thickness should be maximum 7mm.  
2) If there is no 60mm free space at back side of the device, it would be difficult to remove it from the panel.

Order Code : ET2011-**□**-**□□□□□**-**□□□**

1 2 3

1- Input selection  
RT....PT100 input  
T....TC input





2 - Supply Voltage  
230VAC...230V AC  
110VAC...110V AC  
024VAC.....24V AC  
SM.....9-30V DC / 7-24V AC

3- Contact current selection  
None.....8A contact output  
P....16A contact output

## CONNECTION DIAGRAM




**ENDA ET2011** is intended for installation within control panels. Make sure that the device is used only for intended purpose. The shielding must be grounded on the instrument side. During an installation, all of the cables that are connected to the device must be free of electrical power. The device must be protected against inadmissible humidity, vibrations, severe soiling. Make sure that the operation temperature is not exceeded. All input and output lines that are not connected to the supply network must be laid out as shielded and twisted cables. These cables should not be close to the power cables or components. The installation and electrical connections must be carried out by a qualified staff and must be according to the relevant locally applicable regulations.

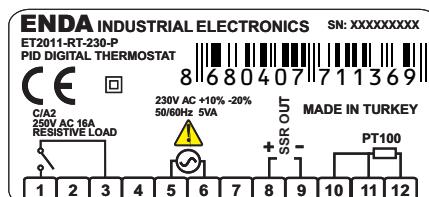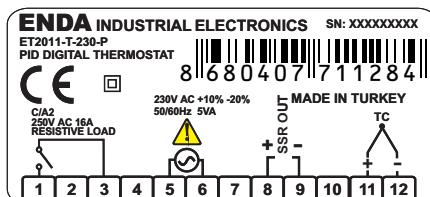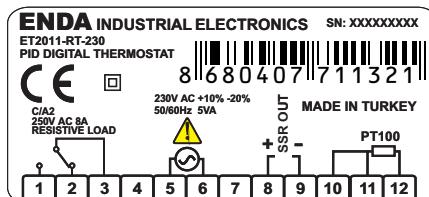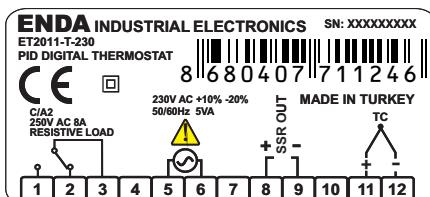

Holding screw  
0.4-0.5Nm

Equipment is protected throughout  
by DOUBLE INSULATION.

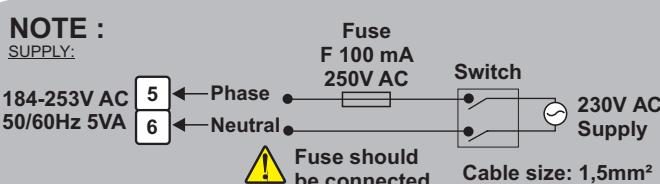

**NOTE :**

**SUPPLY:**

1) Mains supply cords shall meet the requirements of IEC 60227 or IEC 60245.  
2) In accordance with the safety regulations, the power supply switch shall bring the identification of the relevant instrument and it should be easily accessible by the operator.