

# TECHNICAL DATA SHEET

Product Code: 2\*0.5mm<sup>2</sup> Loudspeaker red/black CCA+PVC

Part Number: 01.037.0500

Page: 1 of 1

Date: 2022-05-18

	Dimensional Features	Material Breakdown
Inner Conductor	28/0.15CCA(+0.005/-0.005)mm	Forged Copper Clad Aluminum
Insulation	2.0*4.0 (+/-0.10)mm	Red, Black PVC insulation
Assembly	Non	Non
Drain wire	Non	Non
Shielding	Non	Non
Ripcord	Non	Non
Sheath	Non	Non


### ▪ Electrical Characteristics

Max.Conductor (A) DC Resistance at 20°C(Ω/100M)	<5.6
Min.Insulation DC Resistance at 20°C(MΩ*M)	>200
Rated Temperature(°C)	70°C
Rated Voltage(V)	24V

### ▪ Cable Construction

### ▪ Physical Characteristics

Minimum Bending Radius(mm)	15×D
Conductor Elongation at Break(%)	>5%
Sheath Tensile Strength (N/mm <sup>2</sup> )	12.50
Sheath Elongation at Break(%)	150.0%

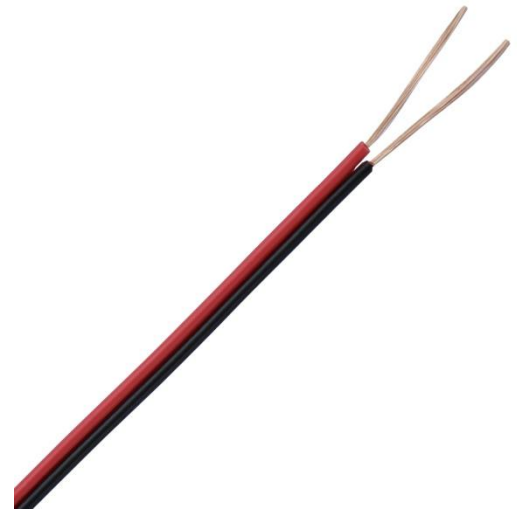

*\*Remark: Please contact us if you have more requirements or specifications subject to change, or else in accordance with the standards.\*  
Please note that the above specification is based on the received requirements and/or our design, we reserve the right to update it to reflect the latest changes*

**TOP Electronic Components S.A.**

66, Alkminis Str., Athens 118 53

Tel: +30-210-3428690/693 ext. #217 Fax:+30-210-3428692