









Rating	16.1A 125V/250VAC		Mounting Hole	Circuit Diagram											
	10(6)A 250VAC 16.1A 125V/250VAC														
Contact Resistance	50m ohm Max.														
Insulation Resistance	DC 500V 100M ohm Min.														
Dielectric Strength	AC 1500V 1 minute		<table border="1"> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75...1.25</td> <td>26.7-0.1</td> <td>25.8+0.1</td> </tr> <tr> <td>1.25...2</td> <td>26.9-0.1</td> <td>25.8+0.1</td> </tr> <tr> <td>2...3</td> <td>27.3-0.1</td> <td>25.8+0.1</td> </tr> </table>	Thickness	X	Y	0.75...1.25	26.7-0.1	25.8+0.1	1.25...2	26.9-0.1	25.8+0.1	2...3	27.3-0.1	25.8+0.1
Thickness	X	Y													
0.75...1.25	26.7-0.1	25.8+0.1													
1.25...2	26.9-0.1	25.8+0.1													
2...3	27.3-0.1	25.8+0.1													
Operation Temperature	-0°C~85°C		150Kohm												
Switch Function	4P DPST ON-OFF(NEON dependent)														



Material:  
 Frame: Black, Nylon#66  
 Actuator: Red, PC  
 Printed: None

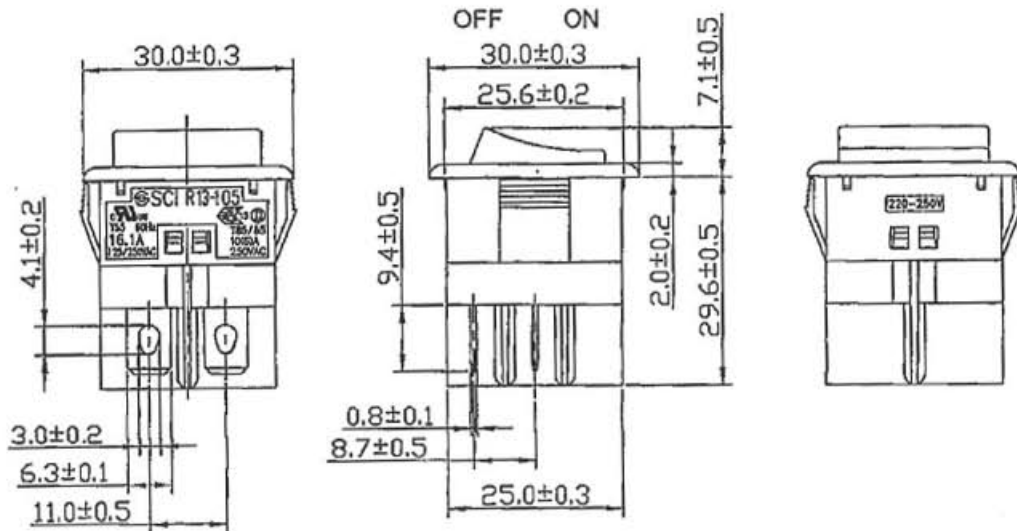

原稿  
 2016.5.27  
 研發部

						△
						△
Date	Name	Description				NO
Drawn	Checked	Approved	1821086	Model Name	ROCKER SWITCH	
周傑輝			Servalite P/N	Model No.	R13-105B-01	Rev.
5/23/16	5/23-16	5/23-16	Unit	mm		.0