

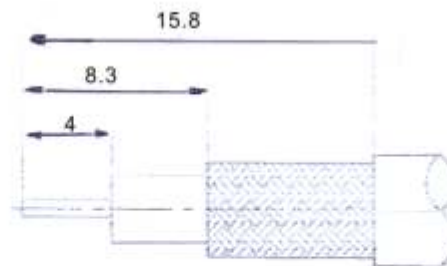


DIMENSIONS ARE IN MILLIMETERS

0.5-5 = ±0.2
 5-30 = ±0.4
 30-120 = ±0.6
 120-315 = ±1
 315-1000 = ±1.6
 1000-2000 = ±2.4

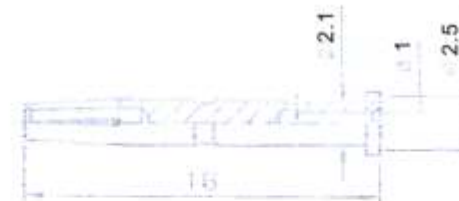

RECOMMENDED
 CABLE STRIPPING DIM'S
 (建議剝線尺寸)

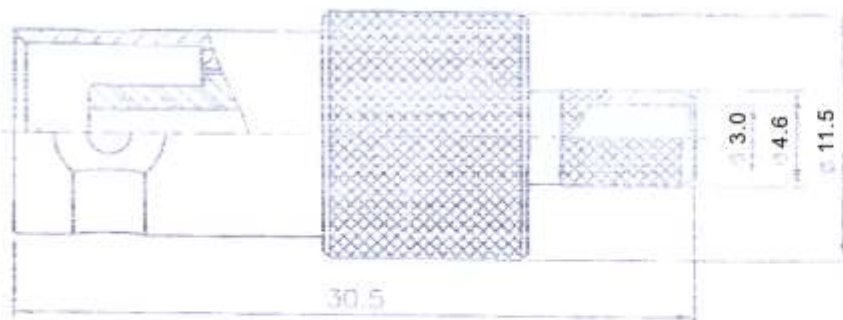

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. BRASS JIS H 3250, C 2/00

1. CRIMPED FERRULE
 HEX CRIMP SIZE .213" (5.41mm)
 (套筒壓著工具)
2. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .068" (1.72mm)
 (中心針壓著工具)

RoHS COMPLIANT

APPROVED BY :



UNITED AU-VI CO., LTD.

Description:

BNC FEMALE CRIMP RG58/U

Part No.:

V-7022A



5	FERRULE	NOTE 4	NOTE 2
4	CONTACT PIN	NOTE 1	NOTE 3
3	LOCK RING	NOTE 1	NOTE 2
2	INSULATOR	DELTRIN	WHITE
1	BODY	NOTE 1	NOTE 2

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY
-----	-------------	----------	--------	------

Date: NOV. 13 2008

File No.: 7061NS501CF001B