
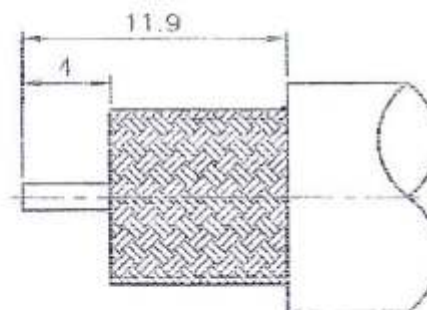
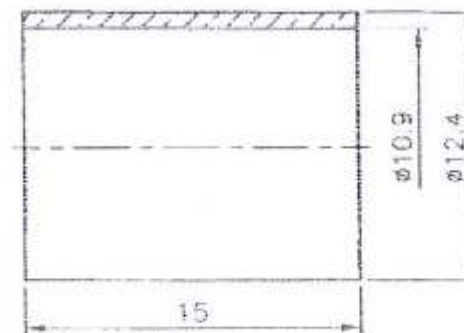
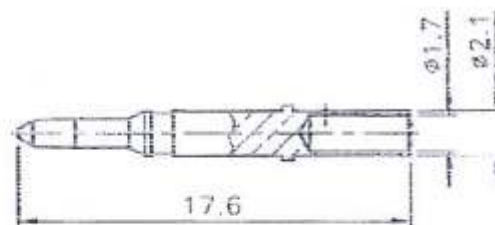


DIMENSIONS ARE IN MILLIMETERS

0.5-5 = +/- 0.2
 5-30 = +/- 0.4
 30-120 = +/- 0.6
 120-315 = +/- 1
 315-1000 = +/- 1.6
 1000-2000 = +/- 2.4

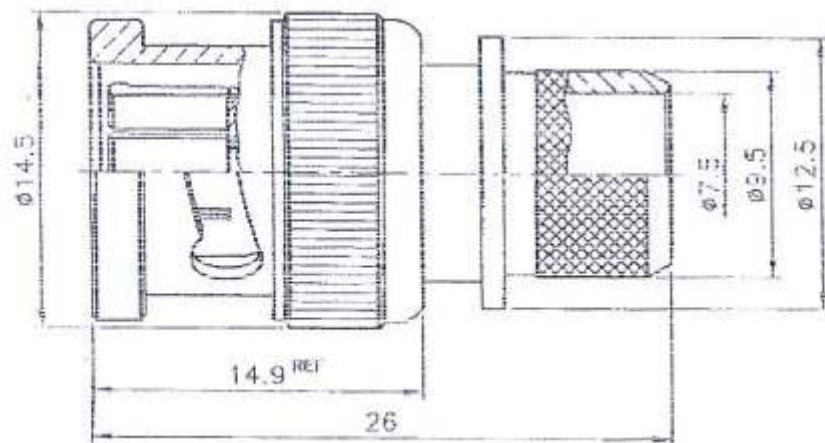

RECOMMENDED
 CABLE STRIPPING DIM'S
 (建議剝線尺寸)

1. CRIMPED FERRULE
 HEX CRIMP SIZE .429" (10.9mm)
 (套管壓管工具)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. BRASS JIS H 3250, C 2700
 4. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 5. ZINC DIECAST

RoHS COMPLIANT

APPROVED BY :



UNITED AU-VI CO., LTD.

Description: BNC MALE CRIMP 75OHM FOR RG11/U
 SOLID

Part No.:
 V-7001Y-18SD

ULTIMAX[®]
 THE ULTIMATE ELECTRONIC COMPONENTS

Date APR. 26 2007

File No.: 7011NS700ZF013B

9	FERRULE	NOTE 3	NOTE 2		
8	CONTACT PIN	NOTE 1	NOTE 4		
7	SHELL	NOTE 5	NOTE 2		
6	GASKET	RUBBER	RED		
5	C RING	SS41	NOTE 2		
4	SPRING	SK5	NOTE 2		
3	WASHER	SS41	NOTE 2		
2	INSULATOR	DELIN	WHITE		
1	BODY	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.