


REVISIONS	
MBOL	DESCRIPTION/DATE

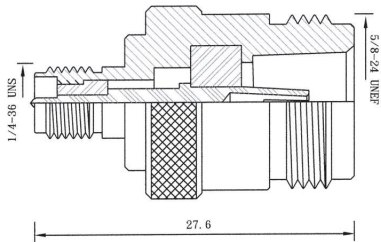

NOTE: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BODY/CONTACT: BRASS PER JIS-C3604
2. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
3. CONNECTOR INTERFACE PER MIL-STD-348A
4. PART TO BE CLEAN AND FREE BURRS
5. NICKEL PL. 70 u" THICK OVER COPPER STRIKE
6. GOLD PL. 1-3 u" OVER NICKEL PL. 70 u" THICK OVER COPPER STRIKE

3	Insulator	Teflon	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
NO	Description	Material	Finish

CUSTOMER OUTLINE DRAWING

Unless Otherwise Specified Tolerances
Dimensions Are In Millimeters
And For Customer Reference Only

0.5-6 \pm 0.2
6-30 \pm 0.4
30-120 \pm 0.6
120-315 \pm 1.0



TAIWAN PRODUCTS
All Connectors Design Right Protected

RF/Microwave Connectors Professional Manufacturer

United AU-VI

Part: V-7834RP

Title: SMA JACK REVERSE POLARITY-N JACK T.G.N.

Date: Sep/29/2009	Drawn: Ken		Scale: 3:1	Unit: M/M	Rev: B-1
-------------------	------------	--	------------	-----------	----------