

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A


B

C


D

E

F

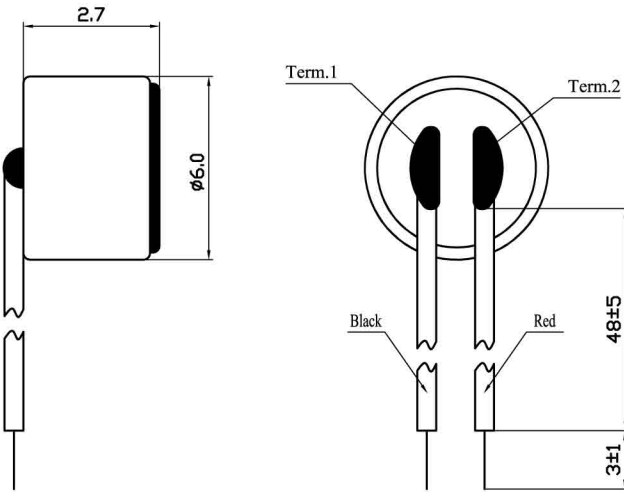

原理图

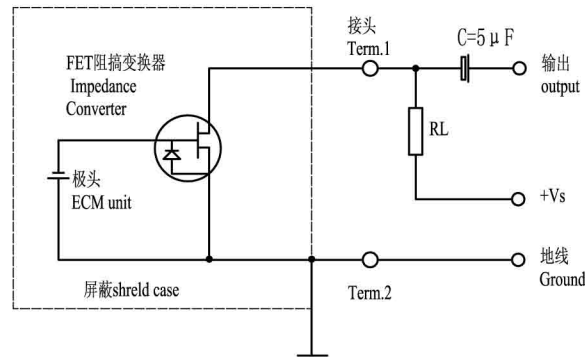

编号 NO.	项目 Items	规格 Specifications
1	额定电压 Rated Voltage	4.5V
2	工作电压 Operating Voltage	1.5V~10V
3	灵敏度 Sensitivity	-38 ± 2dB at 1KHz(0dB=1V/μ Pa) -58 ± 2dB at 1KHz(0dB=1V/μ bar)
4	消耗电流 Current Consumption	0.5mA Max
5	频率范围 Frequency	100~16,000Hz
6	信噪比 S/N Ratio	≥60dB
7	灵敏度减低 Sensitivity Reduction	within-3dB at 1.5V
8	方向性 Directivity	Omnidirectional
9	测试条件 Testing Condition	1000Hz, Vs=4.5V, RL=2.2K Ω
10	壳体材料/颜色 Shell Material/Color	AL/Silver
11	工作温度 Operating Temperature	-25~+55 °C
12	贮存温度 Store Temperature	-25~+55 °C
13	重量 Weight	<0.1g
备注 Note:	Compliance with ROHS	

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°	DRAWN		CUSTOMER		
	DESIGN		KPCM-G27B		
	CHECKED		CUSTOMER NO.		
	APPROVED		DWG NO.		
	DATE	07.07.05	KP3.841.402R		
CONTRACT NO.			VER	1.0	SCALE
AGENCY APPROVAL			UNIT	mm	SHEET
FIRST ANGLE PROJECTION					

△			
△			
△			
△			
NO.	DATE	REVISION	REFERENCE DWG

1

2

3

4

5

6

7

8