






N = Number of contact

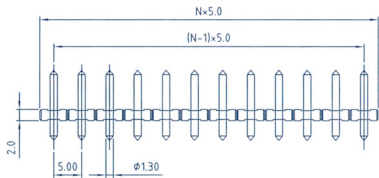

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	02/07'06	Part No. changed	Tony

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Solid PIN: Brass(CuZn)
- Surface of solder tail: Tin plated
- Insulator(housing): Thermoplastic (UL94 V-0)

Electrical: UL CSA

- Voltage rating: 300V 250V
- Current rating: 10A 10A
- Withstanding Voltage: 1.6KV 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 245°C±10°C/5 Sec
- Safety Approval:

△ Part No.:

OP xx 0 x 0 0 xxxxx G

POLES

- 02 pole
- ...
- 24 pole

Dim A Length

- 0 12.5mm
- 3 11.5mm
- 4 14.2mm
- 5 17.5mm
- 6 20.0mm
- 9 16.5mm

G: Pb+40000ppm

0000: Standard  
Any special item by  
customer request.  
please contact sales  
department.

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR COPIE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OP 5.0 Series			
PART NO.		OPxxx0x00xxxxG		DWG NO. 80P0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Tony 2006.02.07	Tony 2006.02.07		
				Tolerance	
				X. ±0.50	
				X.X ±0.30	
				X.XX ±0.10	
				X* ±1*	
				UNIT: mm	
				SCALE: NONE	
				REV: C	
				SHEET: 01/01	