



SPECIFICATIONS

STYLE	75°C 300V COMMUNICATION CABLE	DOCUMENT NO :
SIZE	UTP 24AWG×4P	ESTABLISHED DATE :
STANDARD : UL 444 & ISO/IEC 11801 & TIA/EIA-568-B.2-1 CAT.6		
APPLICATION : HIGH PERFORMANCE LAN CABLE ARE SUITABLE FOR PERFECT AUDIO DATA AND VIDEO OF TRANSFER FOR HORIZONTAL NETWORK		
CONSTRUCTION :		
CONDUCTOR	SIZE	24AWG × 4P
	CONSTRUCTION	SOLID BARE COPPER
	COND. DIAM.	1/0.560±0.01 mm.
INSULATION	AVG. THICK.	0.20 mm.
	MIN. THICK.	0.19 mm.
	DIAMETER	1.00 ± 0.04 mm.
	MATERIAL	HDPE
	COLOR CODES	1. BLUE × WHITE/BLUE STRIPE 2. ORANGE × WHITE/ORANGE STRIPE 3. GREEN × WHITE/GREEN STRIPE 4. BROWN × WHITE/BROWN STRIPE
INNER CORES	PAIR STRANDED	2 CORES STRANDED
	ASSEMBLY STRANDED	FILLER+4 PAIR STRANDED
	-----	-----
OUTER JACKET	MIN. AVG. THICK.	0.44 mm.
	MIN. THICK.	0.36 mm.
	DIAMETER(approx.)	6.30 mm.
	MATERIAL	PVC (Lead & Lead Compounds Free)
	COLOR	Customer

Edition : 1.0

February 1 ,2007



SPECIFICATIONS

ELECTRICAL & PHYSICAL PROPERTIES :			
ITEM		24AWG × 4P	
RATING TEMP VOLTAGE		75°C 300V	
CONDUCTOR RESISTANCE		9.38 Ohm/100m (Max.)	
MUTUAL CAPACITANCE		5.6 nF/100M (MAX.)	
DIELECTRIC STRENGTH		AC 1.5 KV/MIN. 2SEC MIN.	
SPARK TEST		2.5 KV	
INSULATION	UNAGED	TENSILE STRENGTH	1200 PSI MIN. (0.84 Kg/m m ²)
		ELONGATION	100% MIN.
	AGED	TENSILE STRENGTH	UNAGED MIN. 75%(100°C ×48HRS)
		ELONGATION	UNAGED MIN. 75%(100°C ×48HRS)
JACKET	UNAGED	TENSILE STRENGTH	2000 PSI MIN. (1.41 Kg/m m ²)
		ELONGATION	100% MIN.
	AGED	TENSILE STRENGTH	UNAGED MIN. 85%(100°C ×240HRS)
		ELONGATION	UNAGED MIN. 50%(100°C ×240HRS)
INSULATION SHRINKBACK		150m/m, 121°C ±1°C ×1HR ≤ 9.5m/m	
COLD BEND TEST		-20°C ×4HRS NO.CRACK	
FLAME RETARDANT TEST		CM	
AC LEAKAGE CURRENT THROUGH OVERALL JACKET		AC 1500V ≤ 10 mA	
DC RESISTANCE UNBALANCE		5% MAX.	
PAIR-TO-GROUND CAPACITANCE UNBALANCE		330 pF/100m (MAX.)	
VELOCITY OF PROPAGATION (VOP,%,MIN)		100 MHz 62.0% ; 250 MHz 62.1%	
PROPAGATION DELAY		250 MHz 536nS/100m MAX.	
DELAY SKEW		1 ~ 250 MHz 45nS/100m MAX.	
MARKING : DAH SAN 75°C UTP 4PR 24AWG TYPE CM ETL VERIFIED TO ANSI/TIA-568-B.2-1 CATEGORY 6 AND ISO/IEC 11801 CATEGORY 6 xxxxM			

Edition : 1.0


February 1 ,2007



SPECIFICATIONS

Electrical Performance

Item (dB) Frequency (MHz)	ATT MAX. (dB/100m)	NEXT MIN. (dB)	ACR MIN. (dB)	PS. NEXT MIN. (dB)	PS. ACR MIN. (dB)	ELFEXT MIN. (dB/100m)	PS. ELFEXT MIN. (dB/100m)	R.L. MIN. (dB)
1	2.0	74.3	70.3	72.3	70.3	67.8	64.8	20.0
4	3.8	65.3	59.5	63.3	59.5	55.8	52.8	23.0
8	5.3	60.8	53.5	58.8	53.5	49.7	46.7	24.5
10	6.0	59.3	51.3	57.3	51.3	47.8	44.8	25.0
16	7.6	56.2	46.6	54.2	46.6	43.7	40.7	25.0
20	8.5	54.8	44.3	52.8	44.3	41.8	38.8	25.0
25	9.5	53.3	41.8	51.3	41.8	39.8	36.8	24.3
31.25	10.7	51.9	39.2	49.9	39.2	37.9	34.9	23.6
62.5	15.4	47.4	30.0	45.4	30.0	31.9	28.9	21.5
100	19.8	44.3	22.5	42.3	22.5	27.8	24.8	20.1
200	29.0	39.8	8.8	37.8	10.8	21.8	18.8	18.0
250	32.8	38.3	3.5	36.3	5.5	19.8	16.8	17.3

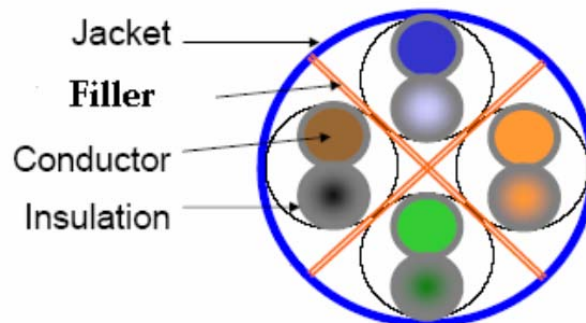

Edition : 1.0

February 1 ,2007