

# TECHNICAL DATA SHEET

Product Code: Unshielded Alarm Cable 6x0.22 TCU+PVC **CPR Eca**

Part Number: 02.006.0005

Page: 1 of 1

Date: 2023-5-5

	Dimensional Features	Material Breakdown
Inner Conductor	7/0.15TC(+0.005/-0.005)mm	Tinned Copper
Insulation	0.95(+/-0.10)mm	Red, Black,Blue, Yellow, Green,White PVC insulation
Assembly	Non	Non
Drain wire	Non	Non
Shielding	Non	Non
Ripcord	200D×3	White synthetical fibres
Sheath	3.90(+/-0.20)mm	White PVC Sheath RAL9003 <b>CPR Eca</b>


## ▪ Electrical Characteristics

Max.Conductor (A) DC Resistance at 20°C(Ω/100M)	<14.3
Min.Insulation DC Resistance at 20°C(MΩ*M)	>200
Rated Temperature(°C)	70°C
Rated Voltage(V)	300V

## ▪ Physical Characteristics

Minimum Bending Radius(mm)	15×D
Conductor Elongation at Break(%)	>5%
Sheath Tensile Strength (N/mm <sup>2</sup> )	12.50
Sheath Elongation at Break(%)	150.0%

## ▪ Cable Construction

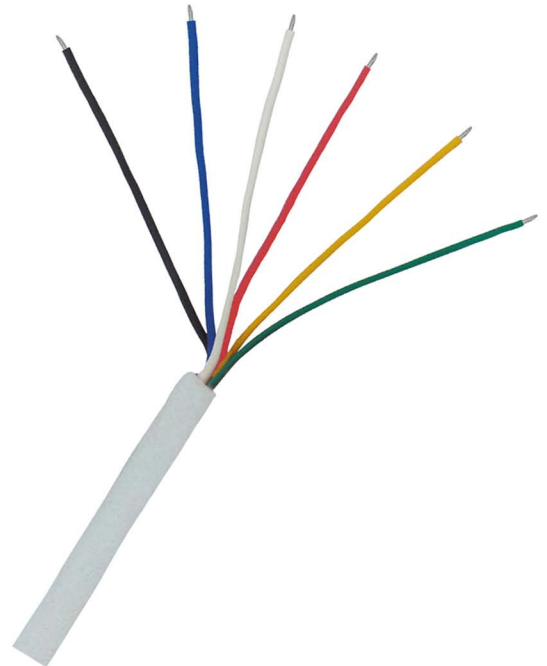

*\*Remark: Please contact us if you have more requirements or specifications subject to change, or else in accordance with the standards.\*  
Please note that the above specification is based on the received requirements and/or our design, we serve the right to update it to reflect the latest changes*