

1

2



3

4


5

6


NO.	REV	DESCRIPTION	DATE

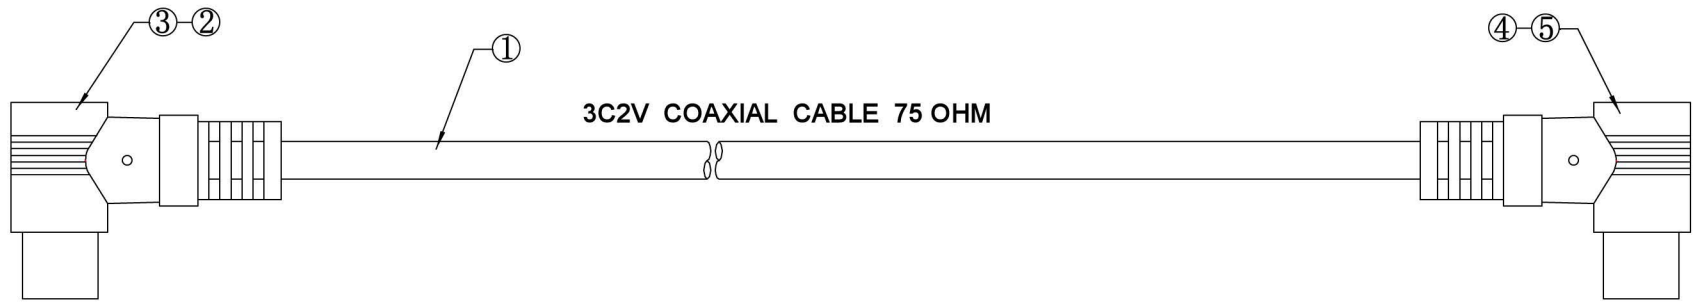


9.5 (male)



9.5 (female)

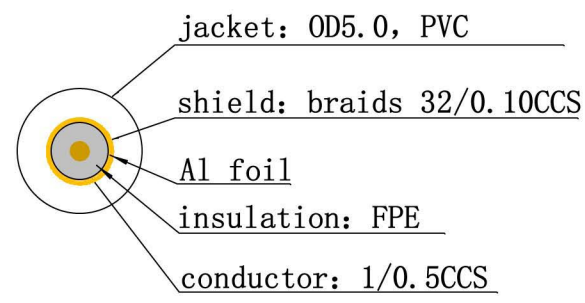

cable structure

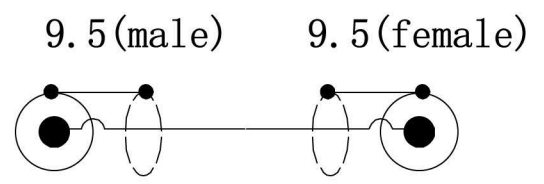

wiring diagram

NOTE:

- 1. 100% OPEN, DISLOCATION TEST;
- 2. ON-RESISTANCE MAX 5.0Ω ;
- 3. INSULATION RESISTANCE MIN 5MΩ ;
- 4. REOHS COMPLIANT.

NO.	Title	Description	Material	Q'ty	Remark
5	9.5 plug	45P PVC		1	
4	9.5 connector	Nickel plated iron (female)		1	
3	9.5 plug	45P PVC		1	
2	9.5 connector	Nickel plated iron (male)		1	
1	cable	1/0.5CCS+FPE+Al+braids32/0.10CCS, OD5.0, PVC			

		9.5TV MALE-9.5TV FEMALE RIGHT ANGEL CABLE			
		PART NO.			
Draw	WZC	CONSUMER			
Check		DATE	2023.10.25	REV.	A
APP.		PAGE 1 of 1	UNIT	mm	SCALE 1:1

1

2

3

4

5

6

FNAME

A

B

C

D

A

B

C

D