



0335 KSS PUSH MOUNT TIE

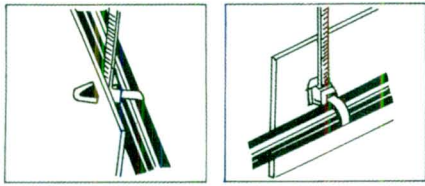

UNIT : mm

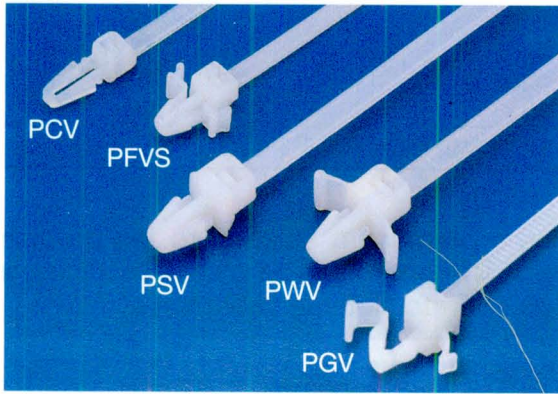

Item No.	Length		W	Max.Bundle Dia.	Mounting hole diameter	Chassis thickness	Min Loop Tensile Strength		Packing
	mm	inch					lbs	kgs	
PCVS-130	132	5 1/8"	4.8	30	4.8	3.0	50	22	100 pcs
PCV-155	168	6 1/8"	3.8	40	4.8	3.0	40	18	
PCVS-200	203	8"	4.8	50	4.8	3.0	50	22	
PCV-200	203	8"	4.8	50	6.4	3.0	50	22	
PFVS-130	131	5 1/8"	3.7	30	4.8	2.4	40	18	
PFVS-155	157.5	6 1/8"	3.7	38	4.8	2.4	40	18	
PFVS-200	207	8"	3.7	50	4.8	2.4	40	18	
PGV-100	101	4 1/8"	3.4	25	4.8	2.5	40	18	
PGV-130	135	5 5/16"	3.4	33	4.8	2.5	40	18	
PSV-130	132	5 1/8"	4.8	30	6.4	3.3	50	22	
PSV-200	202	8"	4.8	50	6.4	3.3	50	22	
PWVS-100	112	4 3/8"	2.5	25	4.6	2.6	18	8	
PWVS-130	133	5 1/8"	4.8	30	4.6	4.5	50	22	
PWVS-155	157	6 1/8"	3.5	36	4.6	3.0	40	18	
PWV-130	132	5 1/8"	4.8	30	6.0	2.8	50	22	
PWV-170	170	6 11/16"	4.6	40	6.0	3.0	50	22	
PWV-200	201	8"	4.8	50	6.0	2.8	50	22	
* PRVS-130HSBK	134.5	5 1/4"	4.8	30	8.2	5.0	50	22	

- Material: UL approved Nylon 66, 94V-2
- Press the tie into a pre-drilled hole and bind the cord by securing the tie.
- * PRVS-130HSBK : UL approved heat stabilized Nylon 66, 94V-2 black

