

CE - Grade Terminal Blocks

Economy Class

T - S(L) series




Housing: Fire Retardant Thermoplastic (conform to EN60998)

Metal Part: Plated Inserts

Temperature: Up to 80°C

Colours: White or Black

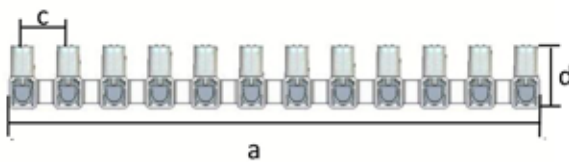

Specification

	<u>T04</u>	<u>T06</u>	<u>T10</u>	<u>T16</u>	<u>T25</u>
Voltage (V)	450	450	450	750	750
Ampere (A)	3 - 6	10	16	30	60
Wiring Capacity up to (mm ²)	2.5 - 4.0	6.0	12.0	16.0	25.0



Dimensions (mm)	<u>T04</u>	<u>T06</u>	<u>T10</u>	<u>T16</u>	<u>T25</u>
Length (a)	93.5	116.5	139.3	169.5	193.4
Width (b)	17.8	20.0	23.4	28.0	36.0
Spacing (c)	8.0	10.0	12.0	14.5	16.5
Height (d)	12.2	14.0	16.3	20.9	26.3

Product Code

T___ - 12 S (L)

04,06 No. of poles = 12 poles

10,16,25