



INSTRUCTIONS

STATIC SINGLE-PHASE ONE MODULE DIN-RAIL WATT-HOUR METER

Electric characteristic


Voltage:	230V +/-30%
Current:	5(50)A
Accuracy class:	1.0
Standard:	IEC62052-11, IEC62053-21
Frequency:	50-60Hz
Impulse constant:	1000imp/kWh
Display mode:	LCD 5+2 = 99999.99kWh Counter 5+1 = 99999.9kWh
Power consumption:	$\leq 8VA \leq 0.4W$
Starting current:	0.004lb
Temperature range:	-20~65°C
Flashing red:	Impulse indication
Average humidity value of year:	75%
Maximal value:	95%

Impulse connection:

Voltage 12~27V, current $\leq 27mA$, max length of lead: 20m

Impulse width=90ms, connect to terminal 20&21

Limits of values: max 60VDC, max 50mA

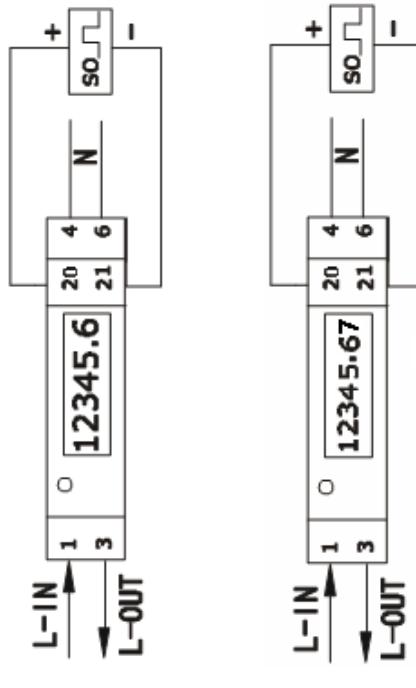

Type 1

Type 2

Attention:

Case is sealed, do not open the meter

No warranty if case is opened

