


Z-15G

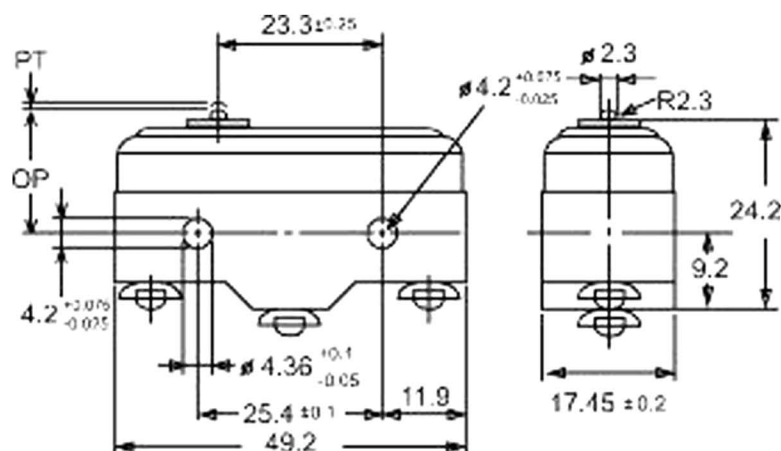

Features :

General Standard

Specifications:

Operating Frequency: 0.01mm-1m/sec

Rated Voltage/Current: 15/600VAC(UL file 240199)

Service Life: Mechanically 1×10⁷ (operations)
Electrically 5×10⁵ (operations)

Operating Temperature: about -25~+80 (-4~+176)

Humidity: <95%RH

Degree of protection: IP00/IP64

Dielectric Strength:

1000VAC for 1 min between current carrying parts

2500VAC for 1 min between non-current carrying parts

Operating Characteristics

| | | | |
|---------------------|-------|---------------------|------------|
| • OF _{max} | 3.43N | • OT _{min} | 0.13mm |
| • RF _{min} | 1.12N | • MD _{max} | 0.05mm |
| • PT _{max} | 0.4mm | • OP | 15.9±0.4mm |