





芯件适配H32B外壳  
Inserts suit for H32B Hood/housing

32 +   
(16x2)



500V max. 16 A

	外型尺寸(mm) Dimensions mm	订货号/Order No.		型号 Type
		公接插体/Male insert	母接插体/Female insert	
螺钉压接 Screw terminal 		2 04 016 2101 2 04 032 2101	2 04 016 2201 2 04 032 2201	HE-016-M(1-16) HE-016-M(17-32) HE-016-F(1-16) HE-016-F(17-32)
弹片压接 Spring terminal 		2 04 016 3101 2 04 032 3101	2 04 016 3201 2 04 032 3201	HE-016-MS(1-16) HE-016-MS(17-32) HE-016-FS(1-16) HE-016-FS(17-32)
冷压针压接 Crimp terminal 		2 04 016 4101 2 04 032 4101	2 04 016 4201 2 04 032 4201	HE-016-MC(1-16) HE-016-MC(17-32) HE-016-FC(1-16) HE-016-FC(17-32)
弹片压接 (双线端子) Spring terminal (two terminals per contact) 		2 04 016 5101 2 04 032 5101	2 04 016 5201 2 04 032 5201	HE-016-MSS(1-16) HE-016-MSS(17-32) HE-016-FSS(1-16) HE-016-FSS(17-32)



(镀银)冷压接插针  
Crimp contacts, silver-plated


标识 Identification	线规 Wire gauge	型号/Type		订货号/Order No.	
		公插针/Male	母插针/Female	公插针/Male	母插针/Female
no groove	0.5 mm <sup>2</sup> AWG 20	CEM-0.5	CEF-0.5	2 03 000 1005	2 03 000 2005
1 groove	0.75 mm <sup>2</sup> AWG 18	CEM-0.75	CEF-0.75	2 03 000 1008	2 03 000 2008
1 groove	1.0 mm <sup>2</sup> AWG 18	CEM-1.0	CEF-1.0	2 03 000 1010	2 03 000 2010
2 groove	1.5 mm <sup>2</sup> AWG 16	CEM-1.5	CEF-1.5	2 03 000 1015	2 03 000 2015
3 groove	2.5 mm <sup>2</sup> AWG 14	CEM-2.5	CEF-2.5	2 03 000 1025	2 03 000 2025
no groove	4.0 mm <sup>2</sup> AWG 12	CEM-4.0	CEF-4.0	2 03 000 1040	2 03 000 2040

(镀金)冷压接插针  
Crimp contacts, Gold-plated

标识 Identification	线规 Wire gauge	型号/Type		订货号/Order No.	
		公插针/Male	母插针/Female	公插针/Male	母插针/Female
no groove	0.5 mm <sup>2</sup> AWG 20	DEM-0.5	DEF-0.5	2 03 001 1005	2 03 001 2005
1 groove	0.75 mm <sup>2</sup> AWG 18	DEM-0.75	DEF-0.75	2 03 001 1008	2 03 001 2008
1 groove	1.0 mm <sup>2</sup> AWG 18	DEM-1.0	DEF-1.0	2 03 001 1010	2 03 001 2010
2 groove	1.5 mm <sup>2</sup> AWG 16	DEM-1.5	DEF-1.5	2 03 001 1015	2 03 001 2015
3 groove	2.5 mm <sup>2</sup> AWG 14	DEM-2.5	DEF-2.5	2 03 001 1025	2 03 001 2025
no groove	4.0 mm <sup>2</sup> AWG 12	DEM-4.0	DEF-4.0	2 03 001 1040	2 03 000 2040

接插体尺寸见HE-016  
Dimensions for inserts see HE-016

接插针排序  
Contact arrangement view  
from termination side

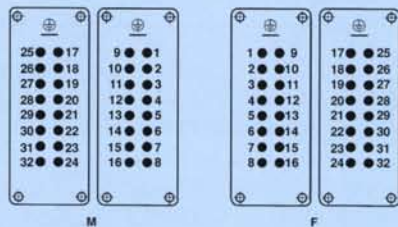

不使用防护外壳时芯体的安装开孔图  
Panel cut out for inserts  
for use without hoods/housings

