


© MPE-GARRY

Standard pin headers with 2,54 mm pitch and 0,64 mm square pins. Any pin length available on request.

Double row pinheader.

Pitch (mm)	2,54
Mating contact size	? 0,64
No of contacts	6
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub> Please consider air- and creepage distances
Withstand voltage	500 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	13,90
B (Mating)	8,20
C (PCB side)	3,30
L	2,50

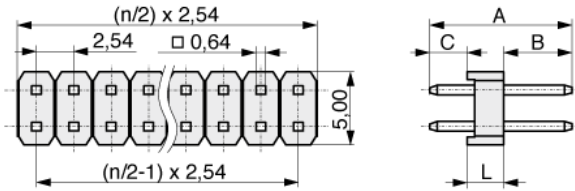

Footprint

