


138


Ejector Header Dip & SMT Type pitch 2.54mm

Technical Data :


Insulator Material:	DIP type: Thermoplastic, PBT, UL 94V-0 SMT type: High Temperature Thermoplastic, UL 94V-0
Contact :	0.64x0.64mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickle
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds. (Only for SMT type)
Mates with :	141

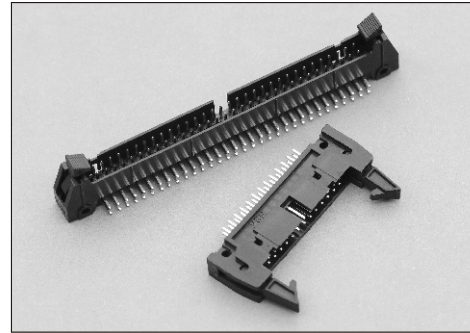

RoHS Compliant

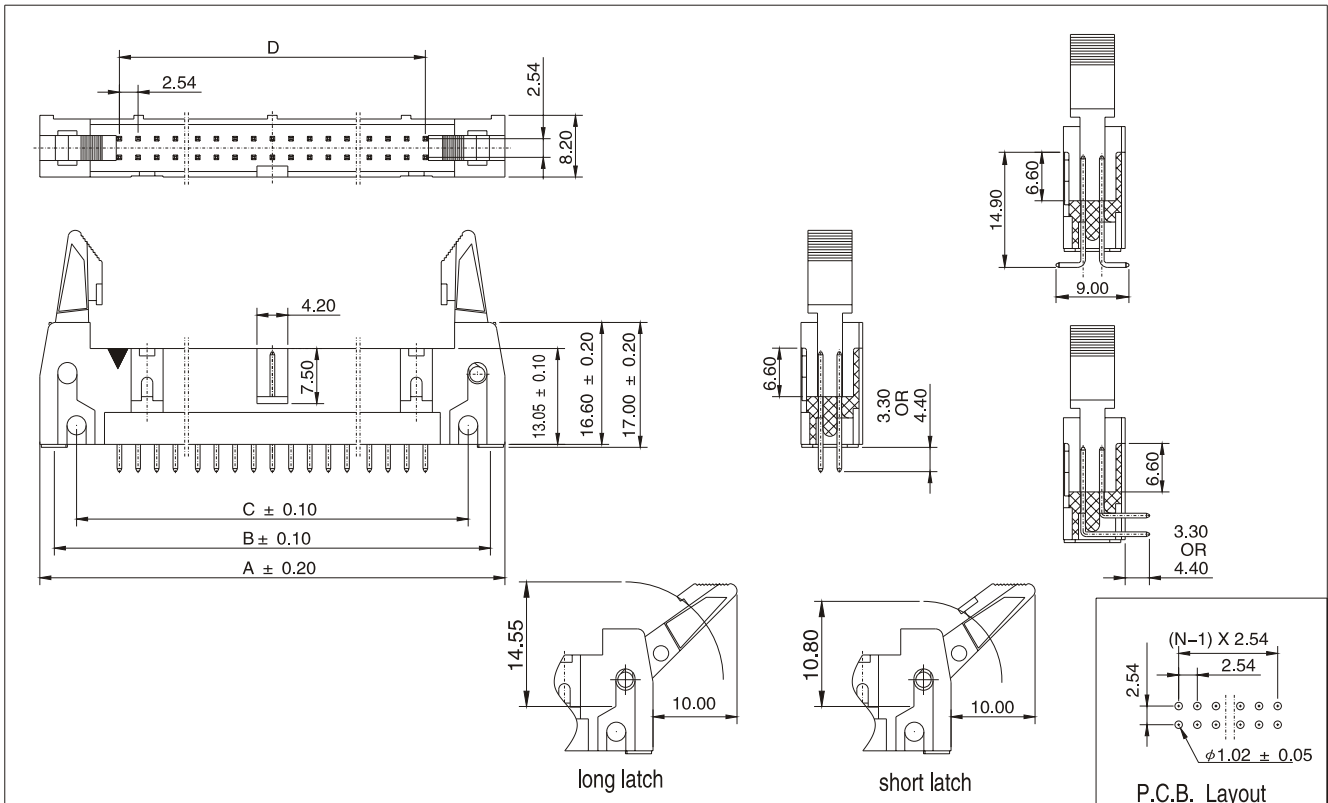

How to order



Nr. of contact	Dimensions(mm)				Code
	A	B	C	D	
10	32.00	27.94	21.04	10.17	010
14	37.08	33.02	26.12	15.25	014
16	39.62	35.56	28.66	17.79	016
20	44.70	40.64	33.74	22.87	020
26	52.32	48.26	41.36	30.49	026
30	57.40	53.34	46.44	35.57	030
34	62.48	58.42	51.52	40.65	034
36	65.02	60.96	54.06	43.19	036
40	70.10	66.04	59.14	48.27	040
50	82.80	78.74	71.84	60.97	050
60	95.50	91.44	84.56	73.67	060
64	100.58	96.52	89.62	78.75	064

Connector type	Code
Dip solder straight	1
Dip solder 90°	2
SMT type	3

Latch lever options	Code
Without latches	00
With short latches	10
With long latches	20

Plating option	Code
Full Gold Flash plated	10
Tin plated	50
Selective gold Flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Solder tail	Code
3.30mm	33
4.40mm	45

W.E.