


139,140

IDC Connector DIP Type & Printed Circuit Type Pitch 2.54 mm


Technical Data :

Insulator Material:	Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Wire size:	28AWG
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .

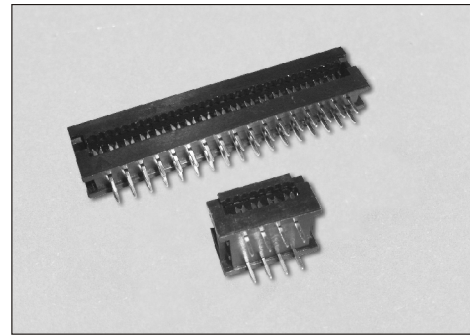


RoHS Compliant

139

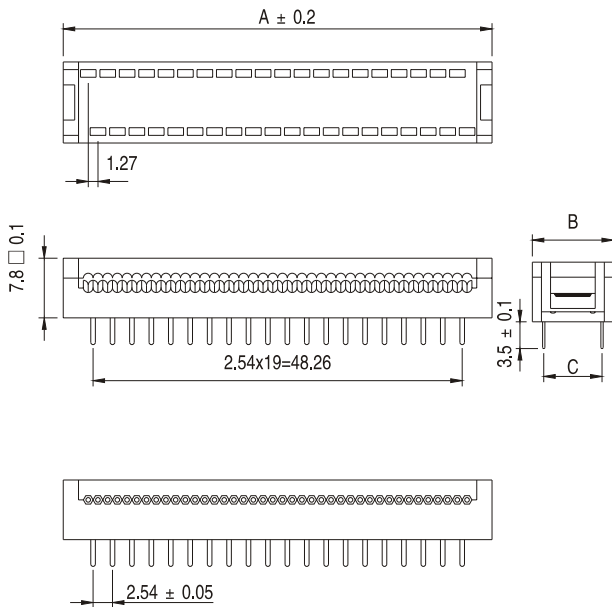

140

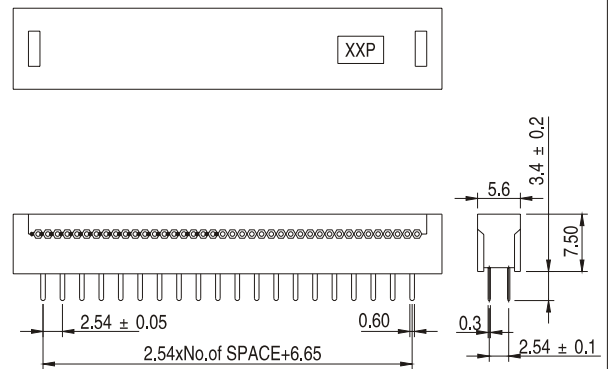

How to order



How to order



Nr. of contact	Dip spacing	Dimensions(mm)			Code	Plating Option	
		A	B	C		Code	
08	7.62mm	15.40	10.60	7.62	083	Selective gold plated	60
10	7.62mm	17.95	10.60	7.62	103		
14	7.62mm	23.03	10.60	7.62	143		
16	7.62mm	25.57	10.60	7.62	163		
18	7.62mm	28.11	10.60	7.62	183		
20	7.62mm	30.65	10.60	7.62	203		
24	7.62mm	35.73	10.60	7.62	243		
40	7.62mm	56.06	10.60	7.62	403		
24	15.24mm	35.73	18.20	15.24	246		
28	15.24mm	40.81	18.20	15.24	286		
40	15.24mm	56.06	18.20	15.24	406		

Nr. of contact	Plating Option	Code
08,10,14,16,18,20	Tin Plated	50
24,26,28,30,34,40	Selective gold plated	60
50,60,64		

W.E.