


Card Edge Connector for Flat Cable pitch 2.54mm

Technical data :

Insulator	Thermoplastic Polyester
Color Insulator	Black
Burning properties	Self extinguishing rated UL94V0
Contact	Phosphor bronze
Plating contact	Gold over nickel
Operating temperature	-40°C to +105°C
Current capacity	1 A

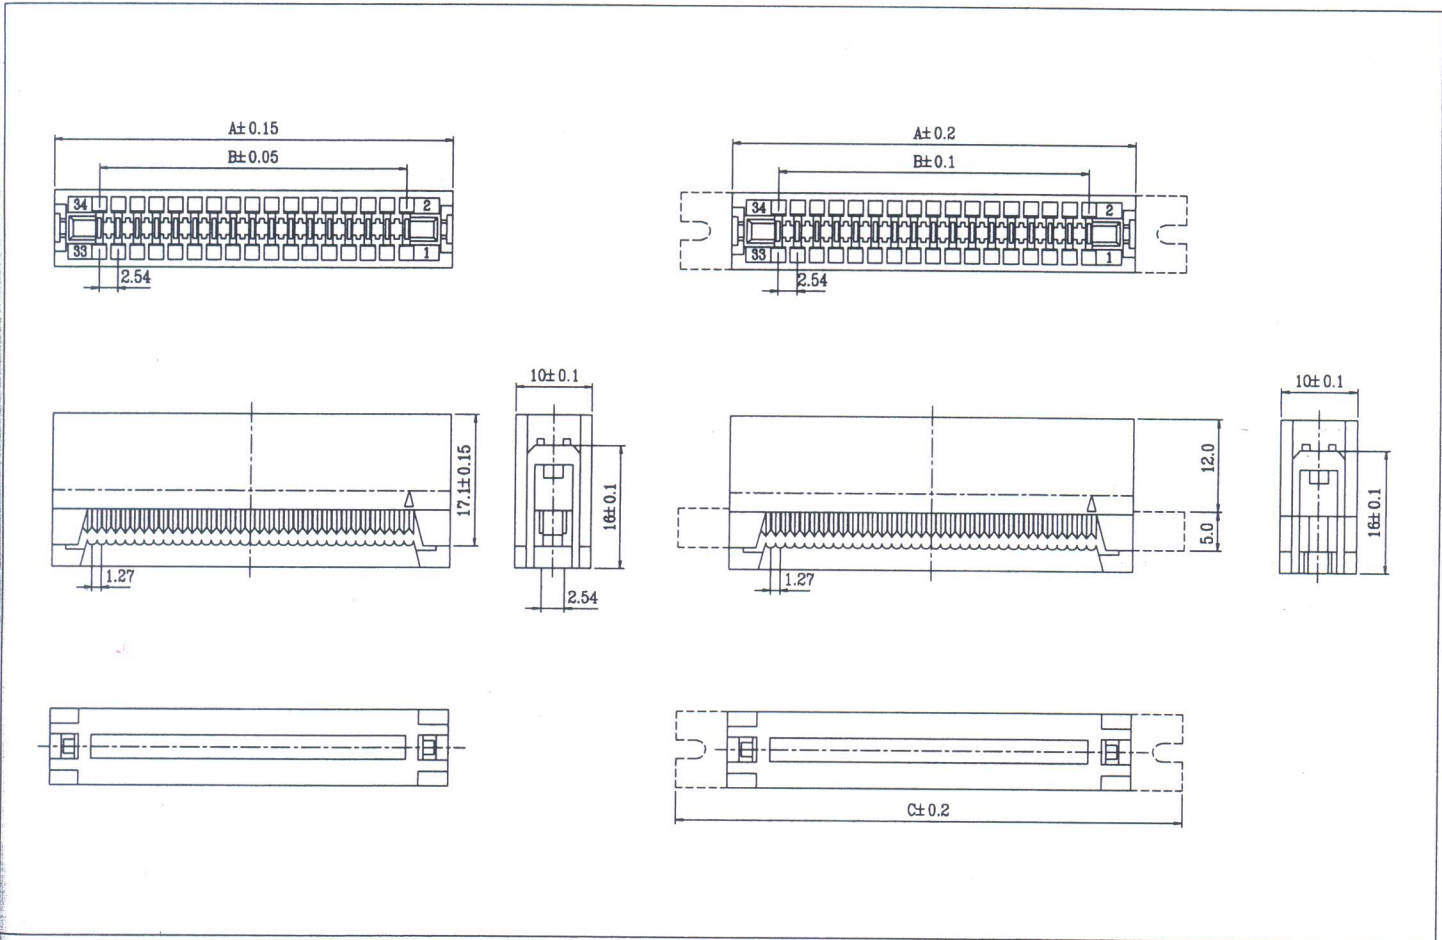

How to order Serie 142



Serie-Nr. Nr. of Contact Cable Clamp Connector Type Plating

Nr. of contact	Dimensions(mm)			Code
	A	B	C	
10	22.31	10.16	38.02	10
14	27.20	15.24	43.10	14
16	29.70	17.78	45.64	16
20	34.90	22.86	50.72	20
26	42.50	30.48	58.34	26
34	52.70	40.64	68.50	34
40	60.32	48.26	76.12	40
44	65.40	53.34		44
50	73.00	60.96	88.82	50
56	80.62	68.58		56
60	85.53	73.66	101.52	60
62	88.07	76.20	104.06	62
64	90.61	78.74	106.60	64

Cable clamp option	Code
Without cable clamp	00
With cable clamp	10

Connector Type	Code
W/o mounting EAR	00
W/ mounting EAR	10

Plating Option	Code
Selective gold plated	60