

JS24-12 12V24Ah (20hr)





Specification

Nominal Voltage	12V
Nominal Capacity	24Ah
Design life	5 years
Terminal	T12
Approx. Weight	Approx 7.55 kg (16.64lbs)
Container Material	ABS
Rated Capacity	24Ah 20Hour Rate (5.00A to 10.8V)
	20.4Ah 5Hour Rate (13.3A to 10.8V)
	18.4Ah 3Hour Rate (33.0A to 10.5V)
Internal resistance	Full charged at 25°C: 14 mOhms
Max. Discharge Current	360A(5S)
Operating Temperature	Discharge: -15~50°C (5~122°F)
	Charge: 0~40°C (32~104°F)
	Storage: -15~40°C (5~104°F)
Charge Voltage(25 °C)	Max. charge Current: 7.2A
	Cycle use: 14.4-15V(-30mV/°C)
	Float use: 13.6-13.8V(-20mV/°C)
Self discharge	25°C (77°F) and then

Application

- > General purpose
- > Uninterruptable Power Supply
- > Electric Power System (EPS) Emergency
- > Backup power supply
- > Auto control system
- > Emergency light
- > Railway signal
- > Aircraft signal
- > Alarm and security system Electronic
- > Apparatus and equipment
- > Warranty: 1 year

Unit: mm Dimension: 177(L)×166(W)×126(H)×126(TH)

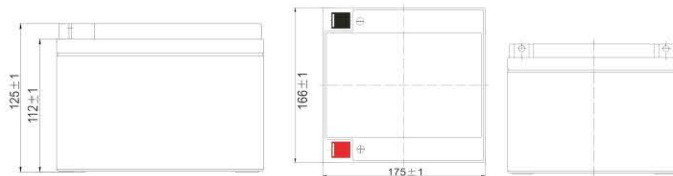

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	45.7	35.1	29.1	25.1	19.4	14.32	12.07	7.14	5.58	4.54	3.70	3.21	2.59	2.16	1.19
1.80V/cell	61.3	44.8	35.1	29.7	22.9	16.7	13.52	7.79	6.01	4.85	3.97	3.45	2.75	2.23	1.20
1.75V/cell	69.2	49.3	38.4	32.0	23.8	17.3	14.14	8.08	6.12	4.96	4.08	3.54	2.80	2.29	1.21
1.70V/cell	76.2	53.7	41.0	33.6	24.8	18.0	14.59	8.28	6.29	5.09	4.18	3.61	2.84	2.34	1.23
1.65V/cell	84.0	58.0	43.6	35.7	26.1	18.4	14.93	8.40	6.56	5.26	4.30	3.69	2.88	2.39	1.25
1.60V/cell	92.6	62.9	46.6	38.0	27.6	19.2	15.07	8.76	6.76	5.43	4.44	3.77	2.91	2.41	1.26

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	83.6	64.8	54.3	47.4	37.0	27.5	23.3	13.9	10.9	8.88	7.26	6.32	5.12	4.28	2.35
1.80V/cell	111.0	81.9	64.7	55.2	43.0	31.8	25.9	15.0	11.6	9.43	7.76	6.75	5.41	4.41	2.37
1.75V/cell	122.5	88.5	69.8	58.8	44.3	32.6	27.0	15.5	11.8	9.60	7.93	6.91	5.49	4.52	2.39
1.70V/cell	131.1	94.3	73.4	61.3	45.9	33.8	27.8	15.9	12.1	9.84	8.12	7.04	5.56	4.61	2.44
1.65V/cell	142.5	100.8	77.5	64.7	48.0	34.4	28.2	16.0	12.6	10.1	8.32	7.18	5.64	4.70	2.47
1.60V/cell	153.6	107.0	81.5	68.1	50.3	35.6	28.3	16.6	12.9	10.4	8.56	7.31	5.68	4.74	2.48

Model Performance Diagrams


Curves of discharge capacity and ambient temperature

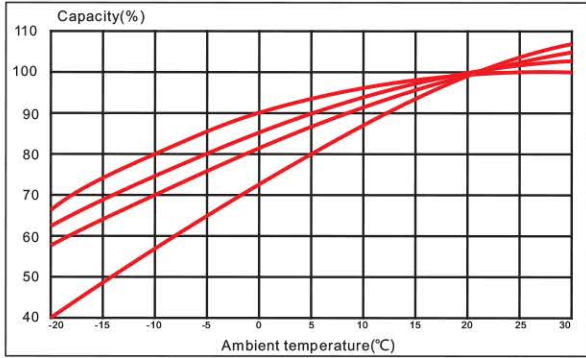


Curves of charging characteristics

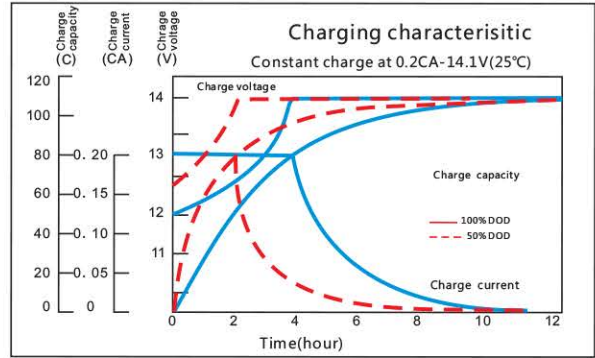


Discharge characteristics at different discharge rate(20°C)

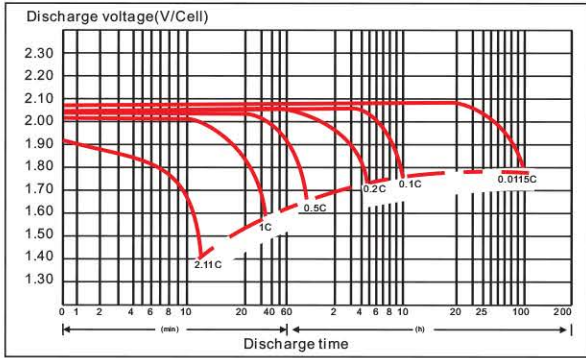


Curves of cycle life

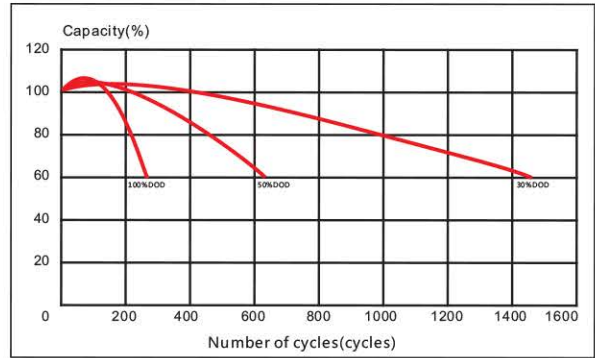

Curves of self-discharge and storage time

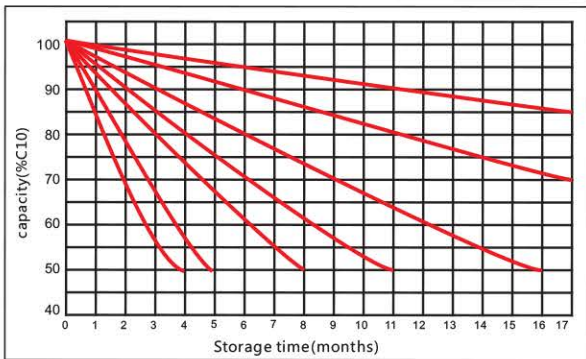

Curves of float voltage and ambient temperature

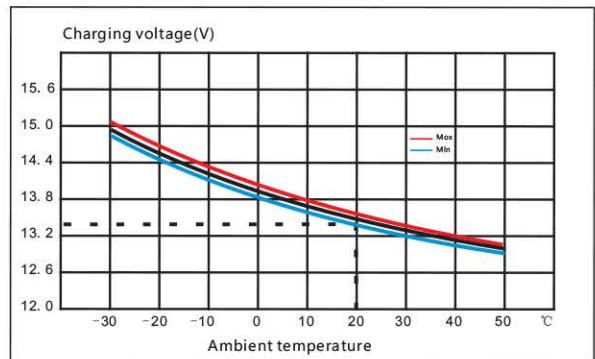

Charging procedures

Application type	Charge Voltage(V)			Max charge current (A)
	Temp (°C)	Set point	Temperature compensation	
Cycle use	25	14.4	-5mV/°C/cell	0.25C
Float use	25	13.65	-3mV/°C/cell	

The relationship between discharge current and voltage

Discharge rate	1hr	3hr	8hr	10hr
End voltage (V)	10.5	10.8	10.8	10.8
Discharge current (A)	0.55C	0.25C	0.12C	0.1C

