


CL21X-B Subminiature Metallized Polyester Film Capacitor-Box

☆Outline Drawing

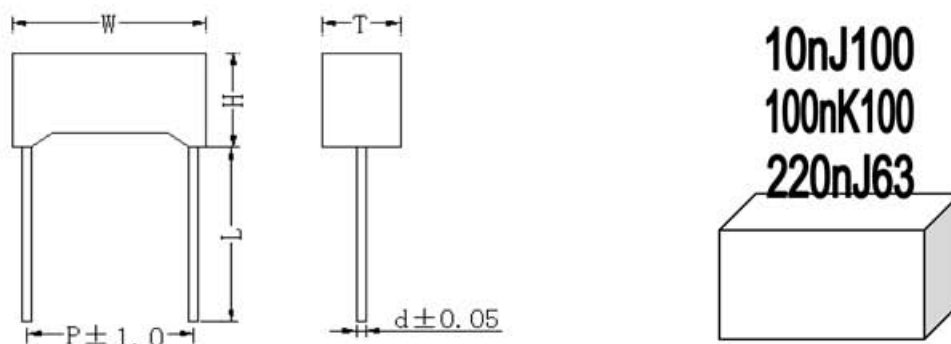

☆Dimensions

Item	W	H	T	P	d	Lmin
103J/100VDC	7.2±0.2	6.5±0.2	2.5±0.2	5	0.5	15
104K/100VDC	7.2±0.2	6.5±0.2	2.5±0.2	5	0.5	15
224J/63VDC	7.2±0.2	7.5±0.2	3.5±0.2	5	0.5	15

☆Specifications

Reference Standard	IEC 60384-2, CECC30401-009	
Climatic Category	40/85/21	
Rated Voltage	(100 , 63)VDC	
Capacitance	(0.01 , 0.1 , 0.22) μ F	
Capacitance Tolerance	K(±10%) , J(±5%)	
Voltage Proof	1.75U _R (5s)	
Dissipation Factor	≤10‰ (20℃,1kHz)	
Insulation Resistance	≥7500MΩ CR≤0.33 μ F	(20℃,1min)
	≥2500s CR>0.33 μ F	