


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/29/05'		

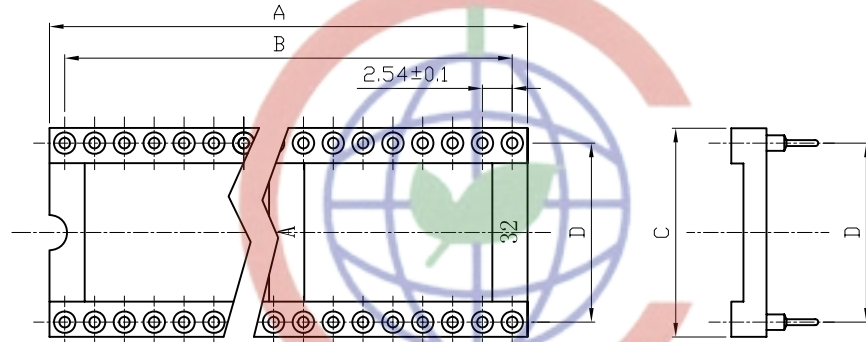

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1001-01
- PRODUCT NUMBER CODE:

DS1001-01 - X X X X X X X

L CENTRAL SUPPORT
 S: W/ CENTRAL SUPPORT
 X: W/o CENTRAL SUPPORT

CLIP PLATING
 F6: Full 3u" gold
 T1: Full Tin

HOUSING MATERIAL
 S: PBT


WIDTH
 N: 7.62mm(06-24P)
 W: 15.24mm(24-40P)

PIN PLATING
 T1: Full Tin
 8: Full GOLD FLASH


CLIP TYPE
 B: 4 FINGERS

No.OF CONTACTS
 06 08 14 16 18
 20 24 28 32 40

SERIES No.
 DS1001-01

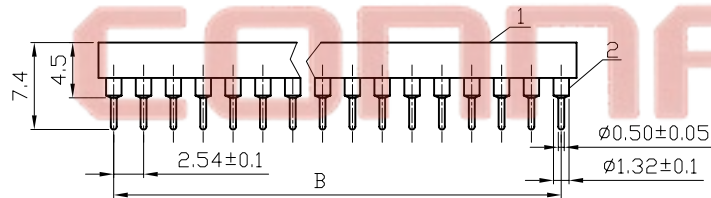

Position	Dimension			
	A±0.5	B±0.3	C	D±0.2
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

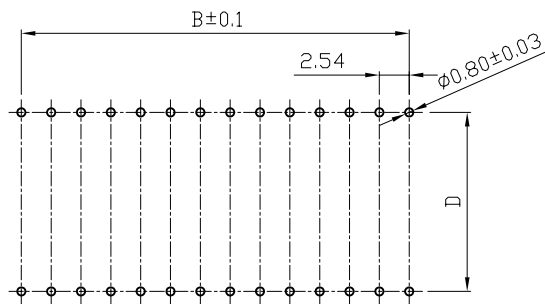

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION		TITLE	DIP IC SOCKET PITCH2.54mm(0.100")
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1001-01 SERIES

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1001-01 - XXXXXXX		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD