





FH10-206Z

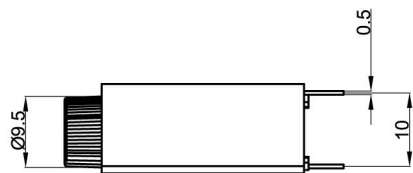

Fuse holder for overload protection

Rating: 10A 250VAC (UL,CUL)

Fuse: Ø5.0x20mm 


Cap: Bayonet type

Operating Temperature: -10°C ~ +70°C

Welding method: Manual Soldering (350° C ± 5° C, 3s ± 0.5s)
: Wave-soldering



P.C.B.LAYOUT



MATERIAL:

Housing: PA66, UL rated 94V2 min

Bayonet: PA66, UL rated 94V2 min

Terminal: Brass, silver or tin plated

FH10-206Z

01.029.0046