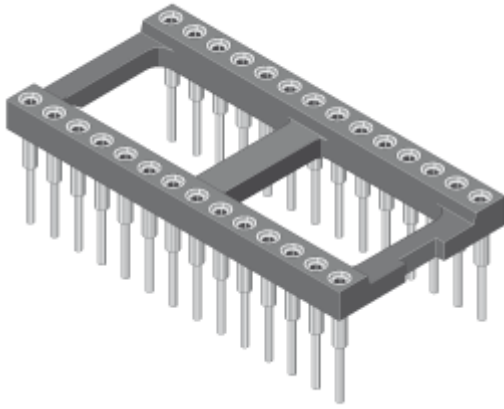


**Order code: 001-2-024-6-B1STF-XT0**


1) IC-SOCKETS, STRIPS, CARRIERS

Series: **001**


IC-sockets with machined contacts in all common pin counts and row spacing's.  
Versions with decoupling capacitor are also available.

Socket with centre bar.

Gender	Female
Pitch (mm)	2,54
Mating pin size (range)	ø 0,40-0,56, ? 0,25x0,45
No of contacts	24
Row distance (code)	600 mil
Contact type	<b>B1</b> - Standard B



Material contact	Copper alloy
Material clip	Beryllium copper
Plating contact	Sn
Plating clip	Au
Insulator Style	With Bar
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	1000 V <sub>RMS</sub> for 1 minute
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
D (Row dist. mm)	15,24
A	30,40
B	17,70
C	10,60

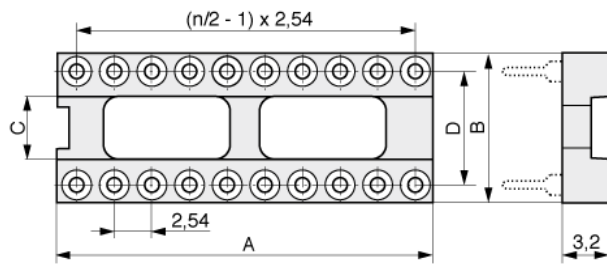**Order code: 001-2-024-6-B1STF-XT0**

MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Date: 05.09.2012 Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=001-2-024-6-B1STF-XT0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=001-2-024-6-B1STF-XT0)