
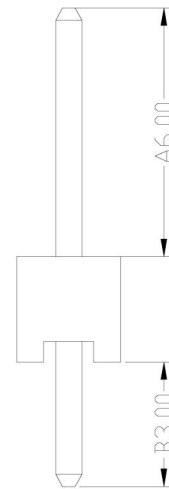
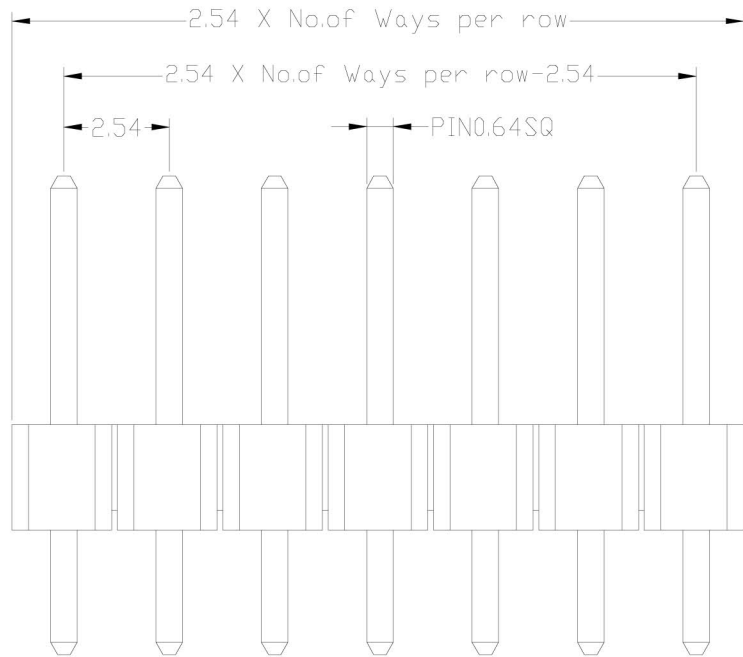


ROHS COMPLIANT

2.54mm Pin Header Straight Type Single Row

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 500M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black




Ordering Code:

HY1005-01- X - X - S - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No.of Contacts
01 To 40
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
A+B+H1/H2
Please mark the desired length in the A/B
- ⑥ Insulator Material
A:PBT
B:PA6T
S:SPECIAL
- ⑦ Packing
A:Tray
B:Bag
T:Tube
- ⑧ Plastic High
H1:1.7mm
H2:2.54mm



PCB LAYOUT

A	B	Unless Otherwise specified tolerance	
		X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	
6.0	3.0	SCALE: As Shown	UNIT: mm
Optional		DRAWN:	TITLE: 2.54mm Pin Header Straight Type Single Row
		CHECKED:	
10/8/1			DRAWING NO: HY1005-01
DATE			PRODUCT NO: HY1005-01

Add option of plating

DESCRIPTION

REV

1 2 3 4 5 6 7 8