


Marking color  
[印记颜色]:  
BK[黑色]

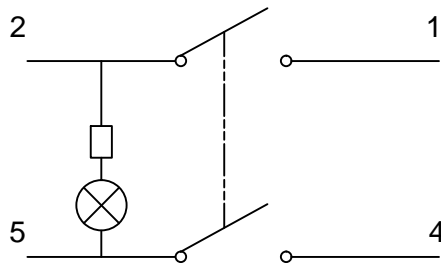


## MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: PC UL 94HB
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub> (10) /Cu

## SPECIFICATION

1. RATING: UL C-UL: 16A 125/250VAC  
ENEC14 :  
16(8)A 250VAC T85/55 1E4
2. NEON LAMP: 220VAC
3. CIRCUIT: ON-OFF W/Lamp DPST 4P
4. CONTACT RESISTANCE: 30m OHMS Max
5. INSULATION RESISTANCE: DC500V 100M OHMS Min
6. WITHSTAND VOLTAGE: AC 1500V 1 Minute
7. ELECTRICAL LIFE: 10000 Cycles at Full Load
8. OPERATION FORCE: 1000~1500gf
9. OPERATION TEMPERATURE RANGE: -25~+85° C

## PANEL HOLE SIZE

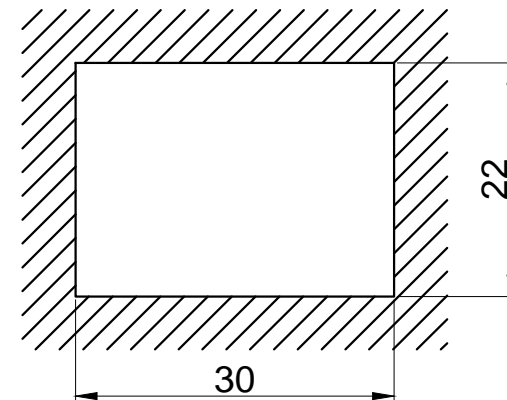

|  |     |          |     |    |     |                                |  |
|--|-----|----------|-----|----|-----|--------------------------------|--|
| RLEIL® NINGBO YINZHOU LIHE ELECTRONIC CO., LTD |     |          |     |    |     | RL2(P)-21/N-2(BK)-OR/BK-P1-(2) |  |
| TITLE  |     |          |     |    |     | SERIES                         |  |
| ROCKER SWITCH                                  |     |          |     |    |     | RL2(P)                         |  |
| FUNCTION                                       |     |          |     |    |     | ON-OFF W/Lamp                  |  |
| DRAWING NUMBER                                 |     |          |     |    |     |                                |  |
| 设计   | 签名  | 年月日      | 标准化 | 签名 | 年月日 | VIEWS TYPE                     |  |
| 绘图   | 符辉  | 17.12.13 |     |    |     |                                |  |
| 审核   | 张雪飞 |          |     |    |     |                                |  |
| 工艺   |     |          | 批准  |    |     |                                |  |