



## SPECIFICATION

- RATING:UL C-UL:16A 125VAC 8A 250VAC  
ENEC SEMKO:  
16(4)A 250VAC T125/55 1E4
- LAMP:DC 12V
- CIRCUIT:ON-OFF W/Lamp DPST 4P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:500~800gf
- OPERATION TEMPERATURE RANGE:-25~+85° C

## PANEL HOLE SIZE

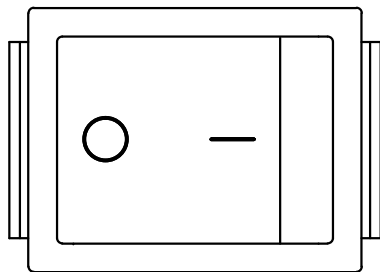

Panel thickness	X
0.75-1.25	28.0
1.25-2.0	28.2
2.0-3.0	28.5

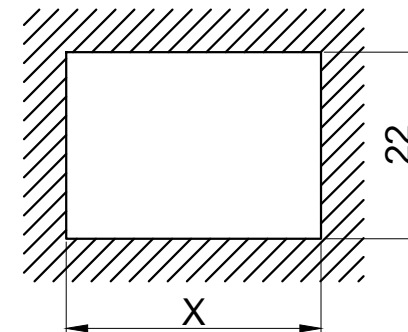

## MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:PC UL 94HB
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub> (10) /Cu

<b>RLEIL®</b> NINGBO HAISHU LIHE ELECTRONIC CO., LTD						RL2-121/N-C-2-RE/BK-P1-12VDC	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL2
绘图	符辉	20.11.23					FUNCTION ON-OFF W/Lamp
审核	张雪飞					VIEWS TYPE 	DRAWING NUMBER
工艺			批准				