



WR


Rating: 20A 125V AC (UL CUL)
 22A 250V AC (ENEC CB CQC)
 Contact Resistance: 50m Ω Max
 Insulation Resistance: DC 500V 100M Ω Min.
 Dielectric Strength: AC1500V 1 minute
 Operating Force: 600±150gf
 Mechanical Life: Over 30,000 cycles
 Electrical Life: Over 10,000 cycles
 Operating Temperature: 0 °C~85 °C
 Safety Approval:

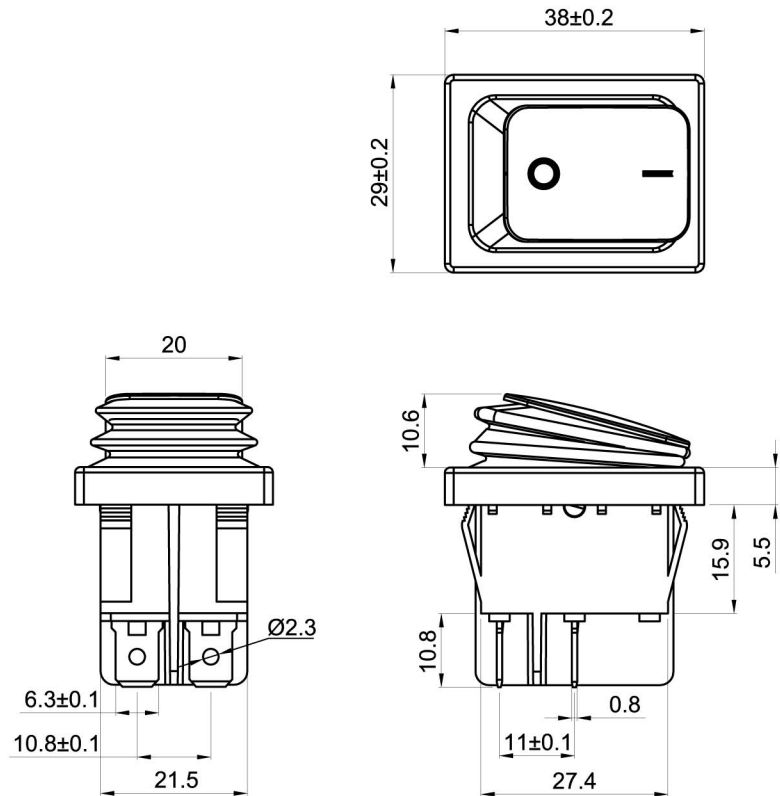

CUT-OUT

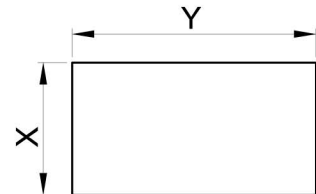

	X	Y
0.75~1.25	22.0+0.1	30.0+0.1
1.25~2.00	22.0+0.1	30.2+0.1
2.00~3.00	22.0+0.1	30.4+0.1

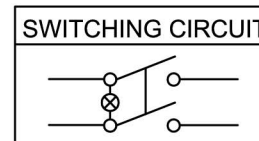

WR-210-P5L-BG
 01.086.0121

MATERIAL:
 Body:Nylon66,UL rated:94V-2 min.
 Actuator:PC
 Terminal:Brass,silver or tin plated