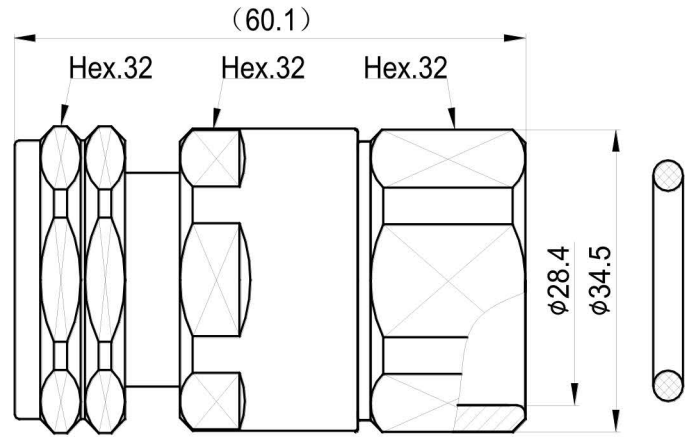


TECHNICAL SPECIFICATION

HXQJ15645

7/16M-7/8"L

Rev:A/0

1. Figure**2. Product Description**

7/16M-7/8"L

7/16 Straight male Connector for 7/8" Flexible RF Cable

3. Material and Plating

Inner Conductor Pin	Brass / Silver Plating
Inner Conductor Socket	Tin Bronze / Silver Plating
Insulator	PTFE/TPX
Body & Outer Conductor	Brass / Trimetal Plating
Gasket	Silicon Rubber
Nut	Brass/Nickel Plating

4. Electrical Characteristics

Characteristics Impedance	50 Ohm
Frequency Range	DC~7.5GHz
Insulation Resistance	$\geq 10000M\Omega$
Dielectric Withstanding Voltage	4000V rms
Operating Voltage	2700V rms
Center contact resistance	$\leq 0.4 m\Omega$
Outer contact resistance	$\leq 0.2 m\Omega$
Insertion Loss	$\leq 0.05dB$
Return Loss(dB) @0.8-1.0 GHz	≥ 30
@1.7-2.2 GHz	≥ 28
PIM3 @900MHz	$\leq -116dBm$

5. Environmental and Mechanical Specifications

Durability (matings)	≥ 500 cycles
Mechanical Shock Test Method	MIL-STD-202, Method 213, Test Condition D
Vibration Test Method	MIL-STD-202, Meth. 204, Cond. A
Temperature Range	-65°C to +85°C
RoHS	Compliant
Sealing Class	IP68

The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.